

SPECIFICATION OF LED CHIP C605-35V [YELLOW ORANGE]

1) Commodity Type and Physical Characteristics.

- | | | |
|----------------------|------------------------------|-------------------|
| 1. Material | InGaAlP/GaAs | |
| 2. Electrode | Top Side P (anode) side | : Au Alloy/Al Pad |
| | Bottom Side N (cathode) side | : Au Alloy |
| 3. Electrode Pattern | | Fig.1 |
| 4. Chip Size | | Fig.2 |
| 5. Chip Thickness | | Fig.2 |
| 6. Emission Area | | Fig.2 |

2) Electro-Optical Characteristics

parameters	symbol	condition	min.	typ.	max.	unit
Forward Voltage	Vf	If=20mA		2.0	2.4	V
Reverse Current	Ir	Vr=5V			10	uA
Brightness	Iv	If=20mA	50	90		mcd
Power Intensity	Po	If=20mA	0.6	1.2		mW
Peak Wavelength	λ_P	If=20mA	595	605	615	nm
Spectral Radiation Bandwidth	$\Delta\lambda$	If=20mA		20		nm
Rise Time	tr	If=20mA		100		ns
Fulltime	tf	If=20mA		100		ns

‡ Die shall be mounted on TO=18 gold header without resin coated. (Ta=25°C)

[Unit: um]

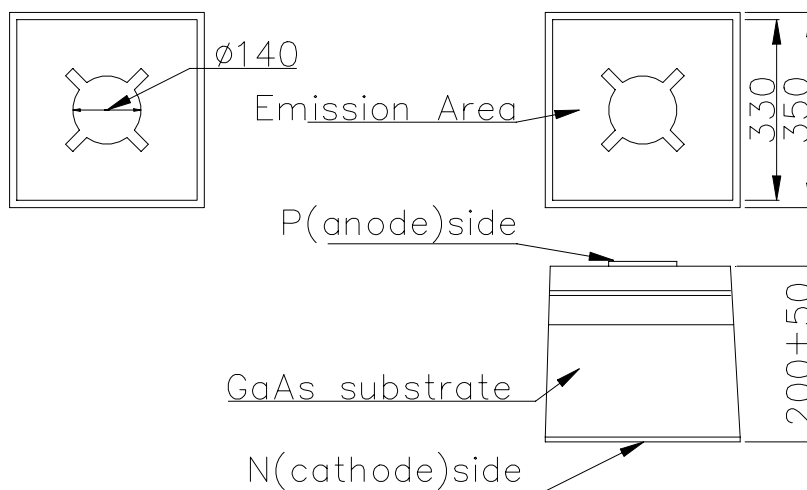


Fig.1 Electrode Pattern

Fig.2 Chip size and Emission Area