

L410-30M32L Higher beam type UVLED

L410-30M32L is an InGaN LED mounted on TO-18 stem and designed for narrow viewing angle +/-5° typ. with hermetical glass ball lens can. On forward bias it emits a spectral band of radiation, which peaks at 410nm.


◆Features

- 1) Narrow viewing angle
- 2) High Radiant Intensity
- 3) High Reliability

◆Specifications

- | | |
|---------------------|-----------------|
| 1) Product Name | LED Lamp |
| 2) Type No. | L410-30M32L |
| 3) Chip Spec. | |
| (1) Material | InGaN |
| (2) Peak Wavelength | 410nm |
| 4) Package | |
| (1) Type | TO-18 stem |
| (2) Lens | Ball Glass Lens |
| (3) Cap | Gold plated |

◆Outer dimension (Unit: mm)

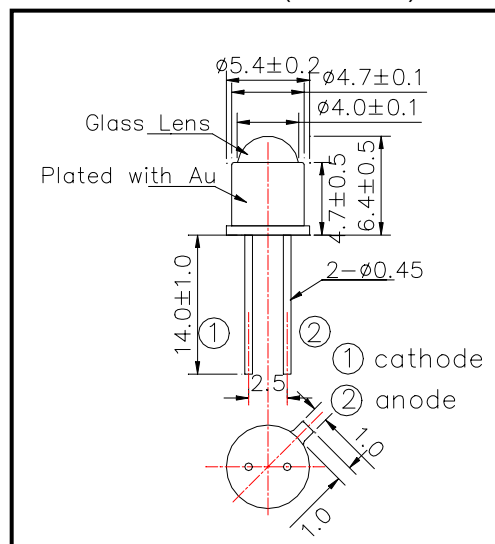

◆Absolute Maximum Ratings

| Item | Symbol | Maximum Rated Value | Unit | Ambient Temperature |
|-----------------------|--------|---------------------|------|---------------------|
| Power Dissipation | PD | 120 | mW | Ta=25°C |
| Forward Current | IF | 30 | mA | Ta=25°C |
| Pulse Forward Current | IFP | 50 | mA | Ta=25°C |
| Reverse Voltage | VR | 5 | V | Ta=25°C |
| Operating Temperature | TOPR | -30 ~ +85 | °C | |
| Storage Temperature | TSTG | -30 ~ +100 | °C | |
| Soldering Temperature | TSOL | 260 | °C | |

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 3 seconds at 260°C

◆Electro-Optical Characteristics

| Item | Symbol | Condition | Minimum | Typical | Maximum | Unit |
|----------------------|-----------------|-----------|---------|---------|---------|-------|
| Forward Voltage | VF | IF=20mA | | 3.3 | 4.0 | V |
| Reverse Current | IR | VR=5V | | | 10 | uA |
| Total Radiated Power | PO | IF=20mA | | 2.8 | | mW |
| Radiant Intensity | IE | IF=20mA | | 40 | | mW/sr |
| Brightness | IV | IF=20mA | | - | | mcd |
| Peak Wavelength | λP | IF=20mA | 400 | 410 | 420 | nm |
| Half Width | $\Delta\lambda$ | IF=20mA | | 15 | | nm |
| Viewing Half Angle | $\theta 1/2$ | IF=20mA | | ± 5 | | ° |

‡Total Radiated Power is measured by Ando Optical Multi Meter AQ2140 & AQ2741.

‡Ando Optical Multi Meter AQ2140 is setted at 405nm range.

‡Radiant Intensity is measured by Epitex's designed and AQ2140 & AQ2741

Marubeni America Corporation

3945 Freedom Circle, Suite 1000, Santa Clara, CA 95054

408-330-0650 (Ext. 323), 408-330-0655 (Fax), sales@tech-led.com