

L7x370-30P96 Multi dies LED with flat glass lens

L7x370-30P96 is seven pieces of InGaN dies mounted on TO-39 stem with ball glass lens. On forward bias it emits a spectral band of radiation, which peaks at 370nm.


◆ Outer dimension (Unit:mm)

◆ Features

- 1) High Power
- 2) High Reliability

◆ Specifications

- 1) Product Name LED Lamp
- 2) Type No. L7x370-30P96
- 3) Chip Spec.
 - (1) Material InGaN
 - (2) Peak Wavelength 370nm
- 4) Package
 - (1) Type TO-39 stem
 - (2) Lens Flat Glass Lens

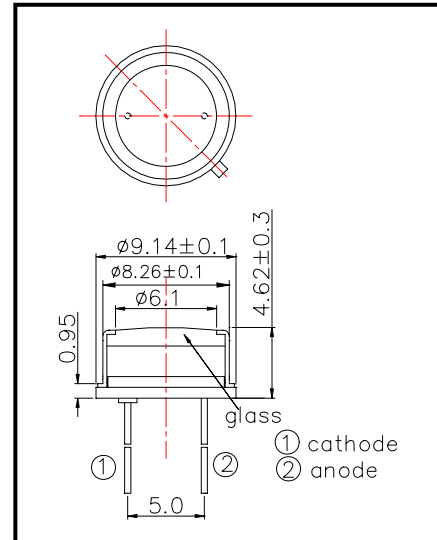

◆ Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P _D	110	mW	T _a =25°C
Forward Current	I _F	200	mA	T _a =25°C
Pulse Forward Current	I _{FP}		mA	T _a =25°C
Reverse Voltage	V _R	3	V	T _a =25°C
Operating Temperature	T _{OPR}	-30 ~ +85	°C	
Storage Temperature	T _{STG}	-30 ~ +100	°C	
Soldering Temperature	T _{SOL}	260	°C	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 3 seconds at 260°C

◆ Electro-Optical Characteristics

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F =100mA		3.4	4.0	V
Reverse Current	I _R	V _R =3V			10	uA
Total Radiated Power	P _O	I _F =100mA		1.2		mW
Brightness	I _V	I _F =100mA				mcd
Radiant Intensity	I _E	I _F =100mA				mW/sr
Peak Wavelength	λ _P	I _F =100mA	360	370	380	nm
Half Width	Δλ	I _F =100mA		20		nm
Viewing Half Angle	θ _{1/2}	I _F =100mA		±		deg.

‡Radiated Power is measured by Ando Optical Multi Meter AQ2730 & AQ2741

‡Radiant Intensity is measured by Tektronix J-6512.

Marubeni America Corporation

3945 Freedom Circle, Suite 1000, Santa Clara, CA 95054

408-330-0650 (Ext. 323), 408-330-0655 (Fax), sales@tech-led.com