

## L850F-06-55 Infrared LED Lamp for High Current Drive


L850F-06-55 is an AlGaAs LED mounted on a lead frame with a clear epoxy lens.

On forward bias, it emits a spectral band of radiation which peaks at 850nm. These devices are intended to be operated at pulsed current of 2A under maximum 4.3V for stable long life.

### ◆ Specifications

1)Product Name	Infrared LED Lamp
2)Type No.	L850F-06-55
3)Chip	
(1)Chip Material	AlGaAs
(2)Chip Dimension	550umx550um
(3)Peak Wavelength	850nm typ.
4)Package	
(1)Type	Φ5mm clear molding
(2)Resin Material	Epoxy Resin
(3)Lead Frame	Soldered

### ◆ Outer dimension(Unit: mm)

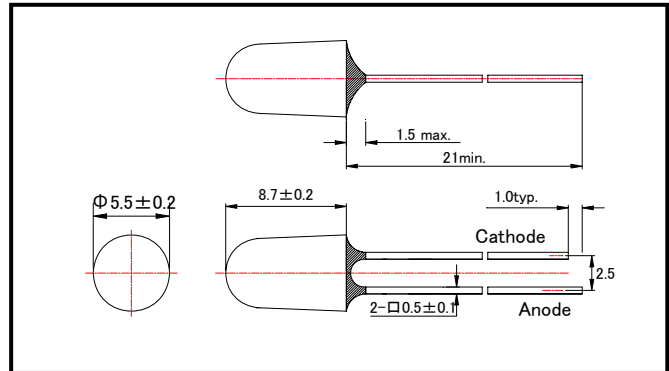

### ◆ Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	PD	150	mW	Ta=25°C
Forward Current	IF	100	mA	Ta=25°C
Pulse Forward Current	IFP	2000	mA	Ta=25°C
Reverse Voltage	VR	5	V	Ta=25°C
Operating Temperature	TOPR	-30 ~ +85	°C	
Storage Temperature	TSTG	-30 ~ +100	°C	
Soldering Temperature	TSOL	260	°C	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 3 seconds at 260°C

### ◆ Electro-Optical Characteristics [Ta=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF/VFP	IF=50mA DC		1.42	1.50	V
		IFP=1A		3.2	3.5	
		IFP=2A		3.6	4.3	
Reverse Current	IR	VR=5V			10	uA
Total Radiated Power	PO	IF=50mA DC	18.0	20.0		mW
		IF=100mA, tp=20ms		40.0		
Radiant Intensity	IE	IF=50mA DC	90	120		mW/sr
		IF=100mA, tp=20ms		240		
Peak Wavelength	$\lambda P$	IF=50mA DC	840	850	860	nm
Half Width	$\Delta\lambda$	IF=50mA DC		40		nm
Viewing Half Angle	$\theta 1/2$	IF=50mA DC		±8		
Rise Time	tr	IF=50mA DC		15		ns
Fall Time	tf	IF=50mA DC		10		ns

‡Total Radiated Power is measured by Photodyne #500

‡Radiant Intensity is measured by Tektronix J-6512.