

L910-__ __

Infrared LED Lamp

This series of L910-__ __ is an AlGaAs LED mounted on a lead frame and encapsulated in various types of epoxy lens which offer different design settings.

On forward bias, it emits a high power radiation of typical 12mW with a peak wavelength at 910nm.

Specifications

- | | |
|--------------------|-------------|
| 1. Chip material | AlGaAs |
| 2. Peak wavelength | 910nm |
| 3. Resin Material | Epoxy resin |
| 4. Solder | Lead free |



Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P_D	150	mW	$T_a=25^{\circ}\text{C}$
Forward Current	I_F	100	mA	$T_a=25^{\circ}\text{C}$
Pulse Forward Current	I_{FP}	500	mA	$T_a=25^{\circ}\text{C}$
Reverse Voltage	V_R	5	V	$T_a=25^{\circ}\text{C}$
Operating Temperature	T_{OPR}	-30 ~ +85	$^{\circ}\text{C}$	$T_a=25^{\circ}\text{C}$
Storage Temperature	T_{STG}	-40 ~ +100	$^{\circ}\text{C}$	
Soldering Temperature	T_{SOL}	265	$^{\circ}\text{C}$	

Electro-Optical Characteristics ($T_a=25^{\circ}\text{C}$)

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V_F	$I_F=50\text{mA}$		1.4	1.6	V
Reverse Current	I_R	$V_R=5\text{V}$			10	μA
Total Radiated Power	P_O	$I_F=50\text{mA}$	7.0	12.0		mW
Peak Wavelength	λ_P	$I_F=50\text{mA}$		910		nm
Half Width	$\Delta\lambda$	$I_F=50\text{mA}$		45		nm
Rise Time	t_r	$I_F=50\text{mA}$		300		ns
Fall Time	t_f	$I_F=50\text{mA}$		150		ns


Characteristics of Radiant Intensity (Ta=25°C)

Type	Viewing Half Angle	Radiant Intensity I _F =50mA Unit : mW/sr			Outer Dimension	Dimension Figure
		Minimum	Typical	Maximum		
L910-01	±10°		70		Φ5	1
L910-02	±7°		70		Φ5	2
L910-03	±10°		70		Φ5	3
L910-04	±20°		20		Φ5	4
L910-05	±40°		7		Φ5	5
L910-06	±7°		65		Φ5	6
L910-09	±25°(Long) ±15°(Short)		35		Φ5 Oval	7
L910-46					Φ5	8
L910-41	±16°		32		Φ4	9
L910-42	±23°		17		Φ4	10
L910-31					Φ3	11
L910-33	±18°		25		Φ3	12
L910-34					Φ3	13
L910-36	±33°		15		Φ3	14

Total Radiant Power is measured by Photodyne #500

Brightness is measured by Tektronix J-16


Outer Dimension of LED Lamp

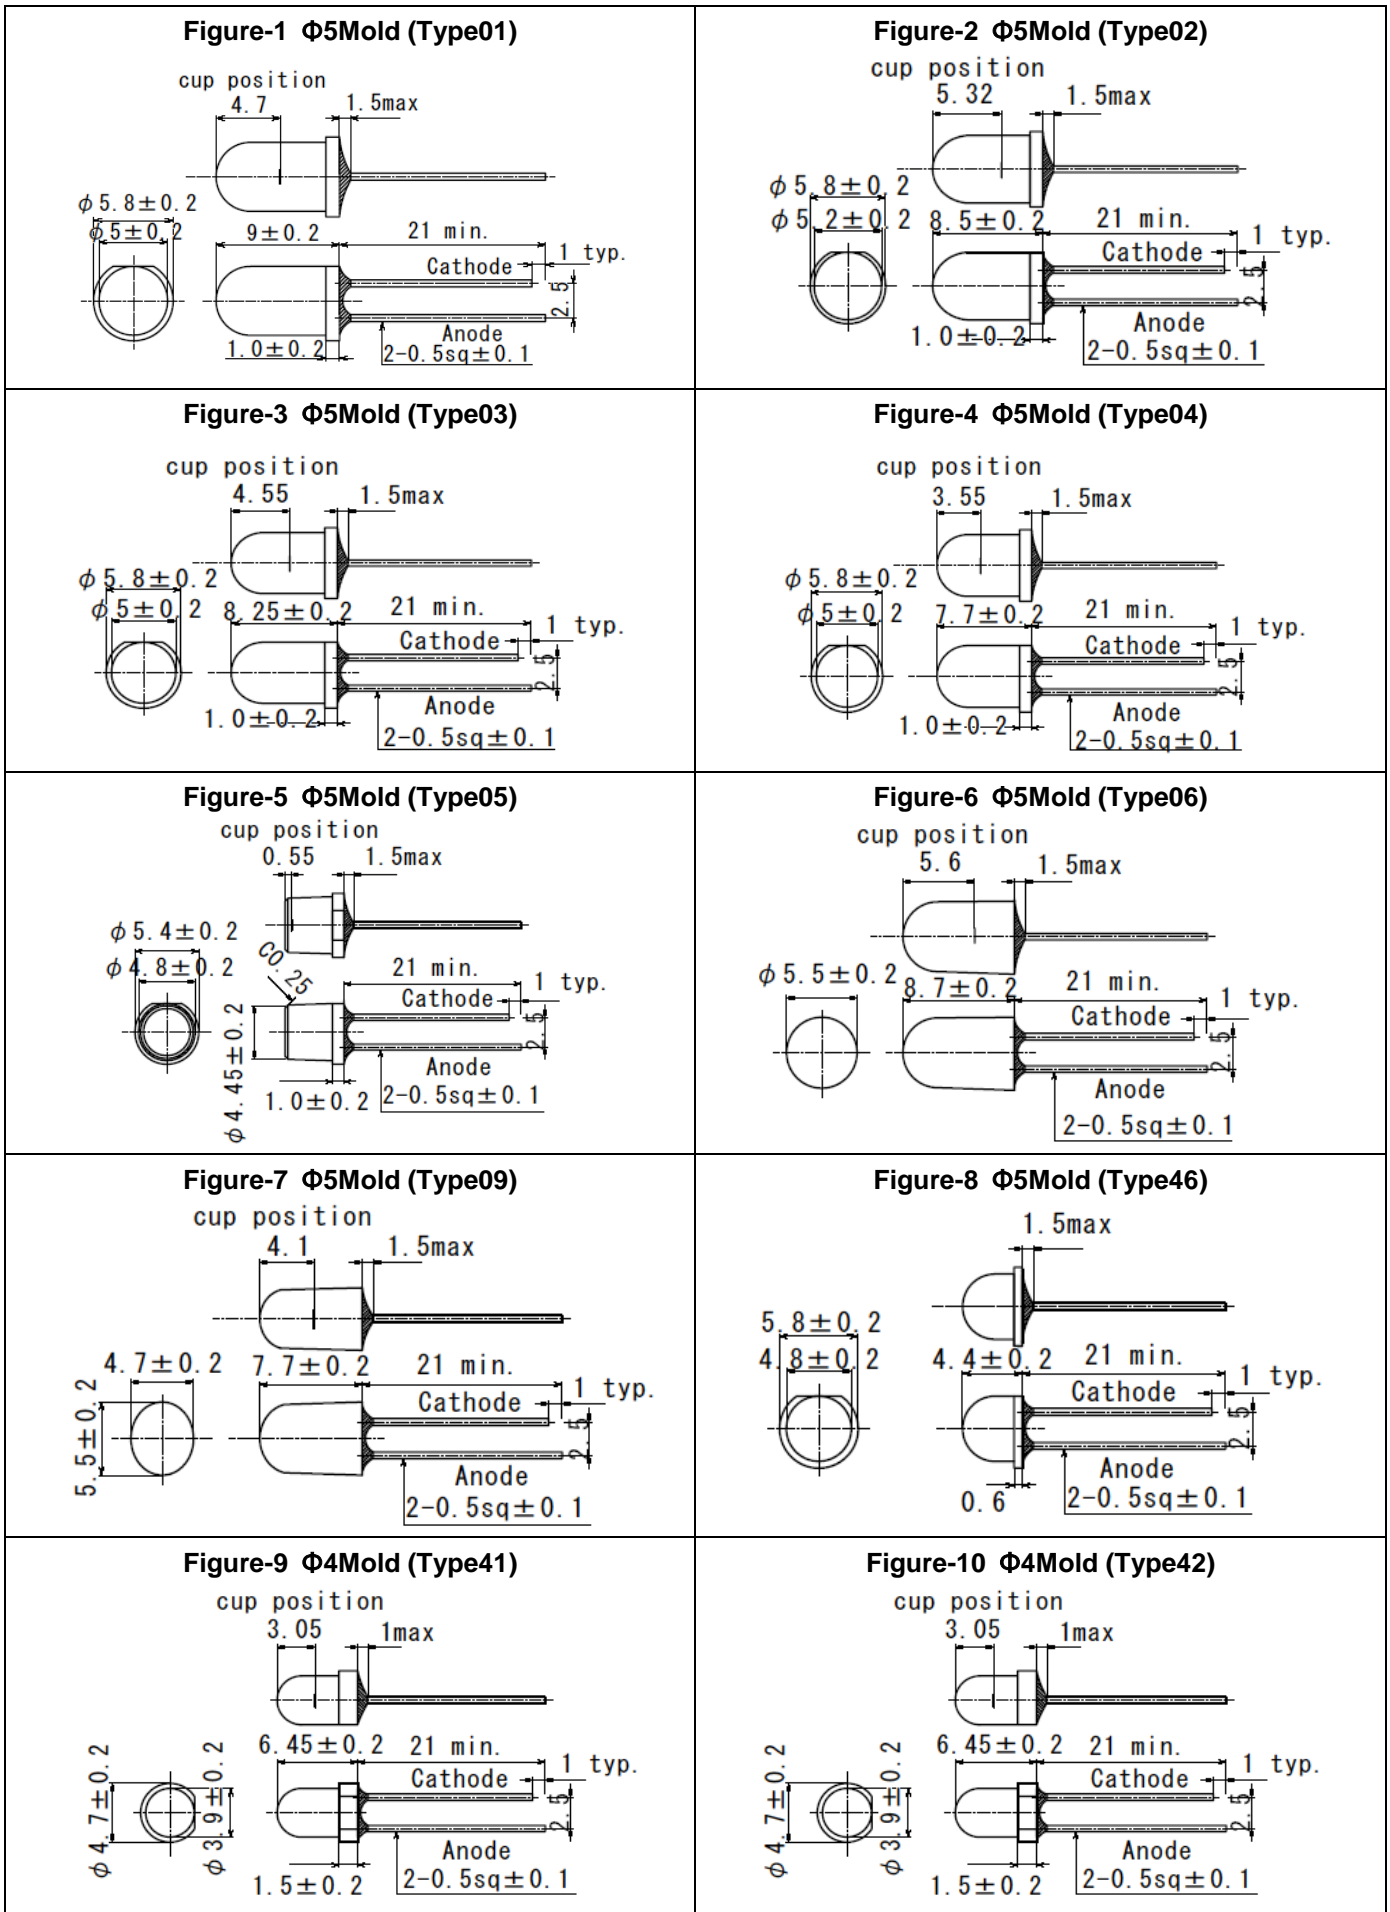



Outer Dimension of LED Lamp





<p>Figure-11 $\Phi 3$Mold (Type31) cup position</p> <p>0.37 1max</p> <p>$\phi 3.6 \pm 0.2$</p> <p>$\phi 3 \pm 0.2$</p> <p>3.5 ± 0.2 21 min. Cathode 1 typ.</p> <p>Anode 2-0.5sq ± 0.1</p> <p>1.5 typ.</p>	<p>Figure-12 $\Phi 3$Mold (Type33) cup position</p> <p>2.65 1max</p> <p>$\phi 3.8 \pm 0.2$</p> <p>$\phi 3 \pm 0.2$</p> <p>5.3 21 min. Cathode 1 typ.</p> <p>Anode 2-0.5sq ± 0.1</p> <p>0.8 typ.</p>
<p>Figure-13 $\Phi 3$Mold (Type34) cup position</p> <p>3.25 1max</p> <p>$\phi 3.8 \pm 0.2$</p> <p>$\phi 3 \pm 0.2$</p> <p>5.3 ± 0.2 21 min. Cathode 1 typ.</p> <p>Anode 2-0.5sq ± 0.1</p> <p>1.5 typ.</p>	<p>Figure-14 $\Phi 3$Mold (Type36) cup position</p> <p>2.1 1max</p> <p>$\phi 4 \pm 0.2$</p> <p>$\phi 3 \pm 0.2$</p> <p>5.3 ± 0.2 21 min. Cathode 1 typ.</p> <p>Anode 2-0.5sq ± 0.1</p> <p>2 ± 0.4</p>
<p>Figure-15</p>	<p>Figure-16</p>
<p>Figure-17</p>	<p>Figure-18</p>
<p>Figure-19</p>	<p>Figure-20</p>





The Viewing half angle

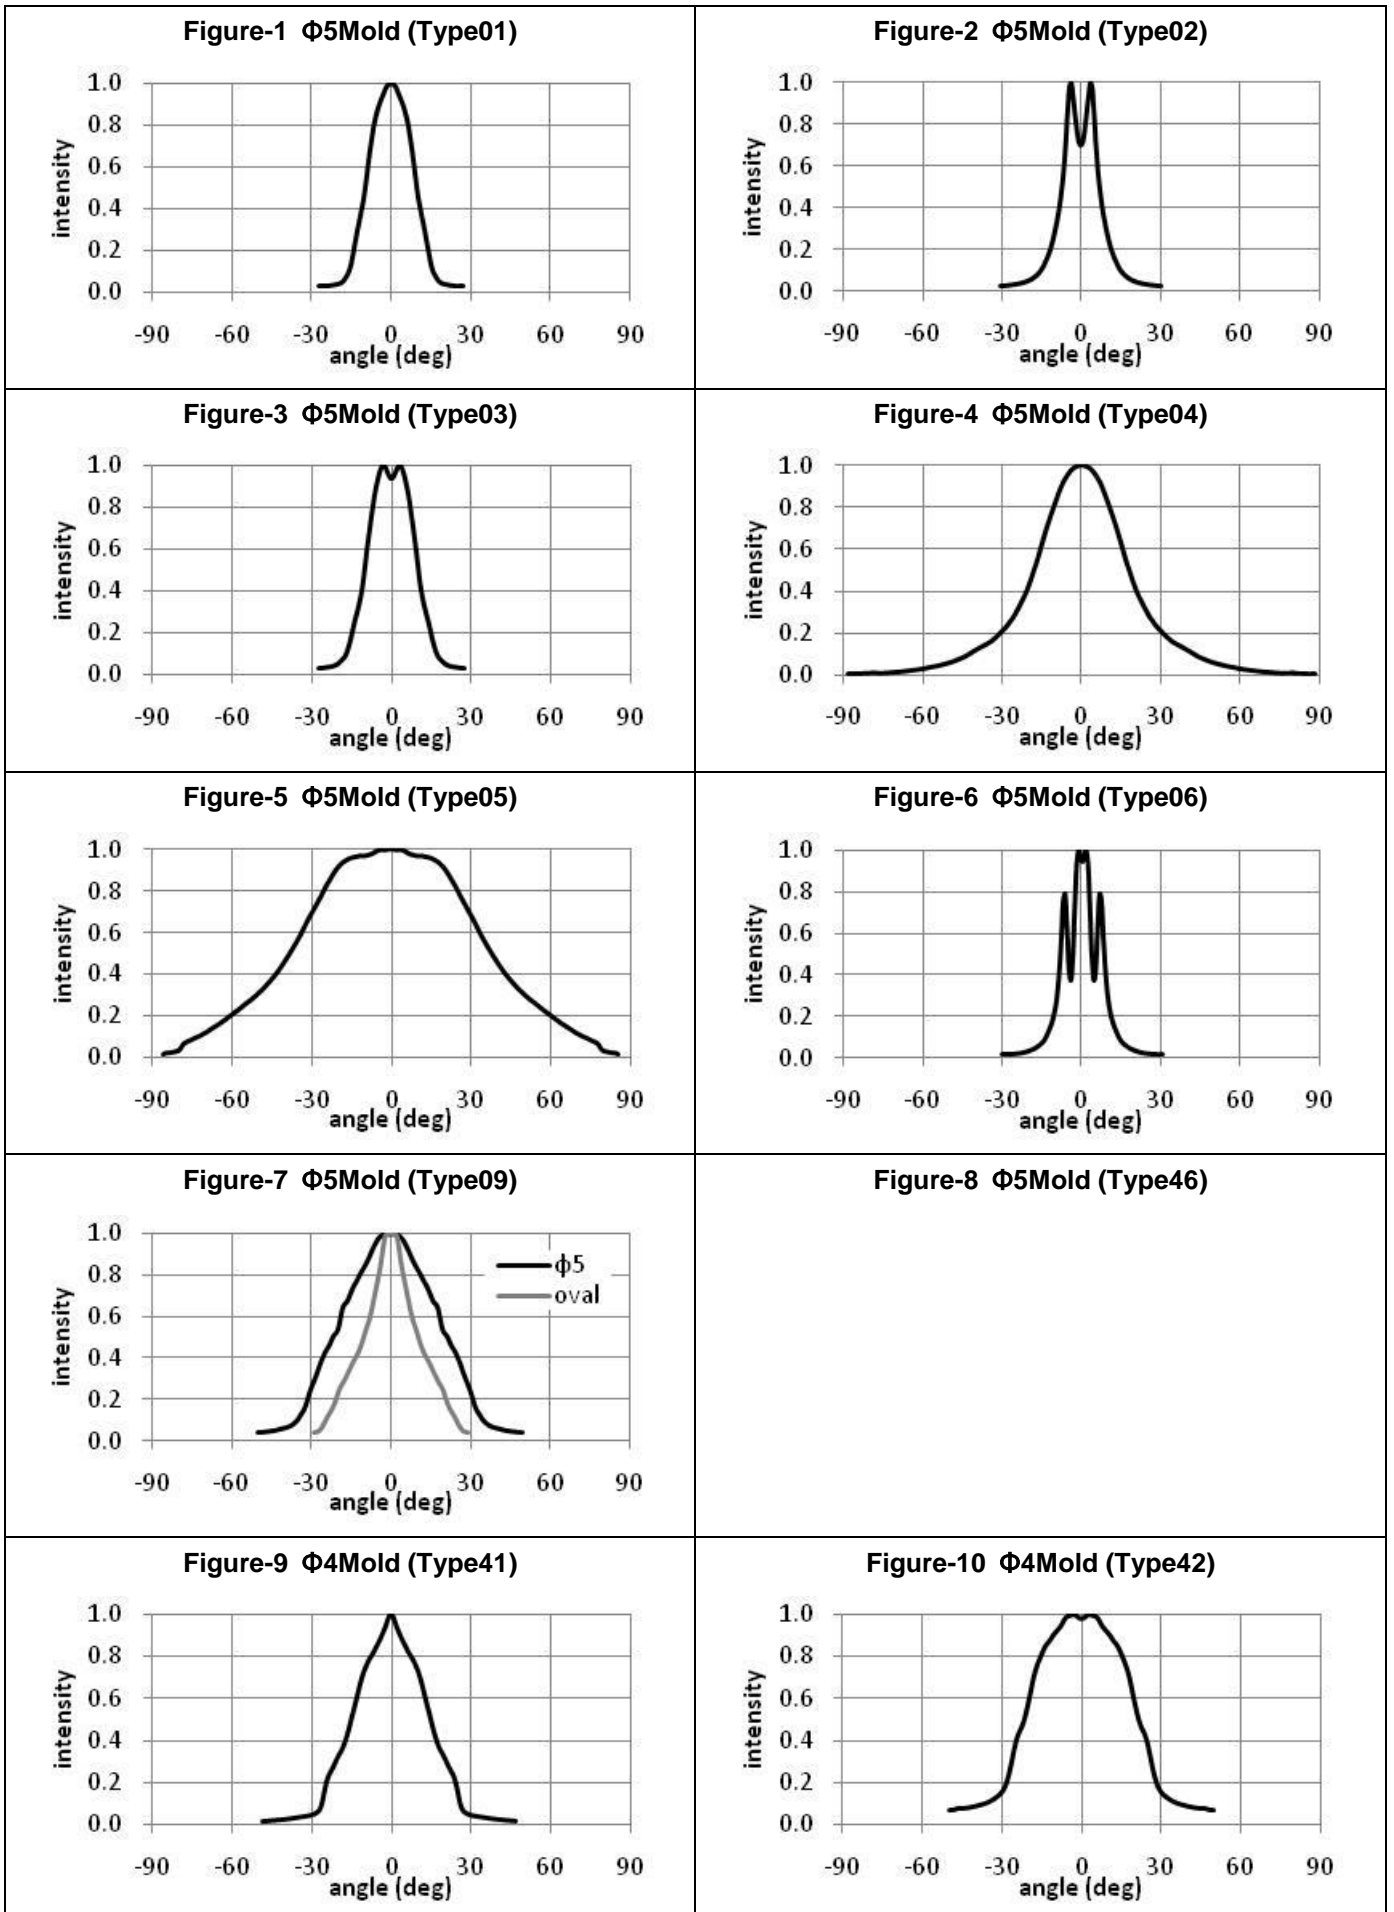


The Viewing half angle
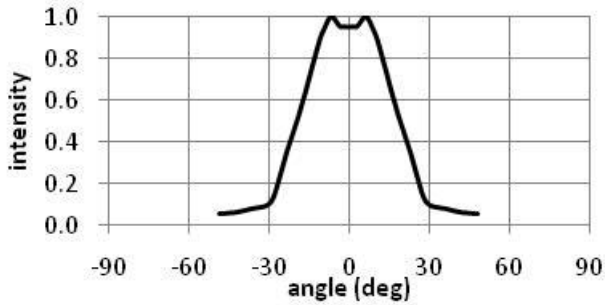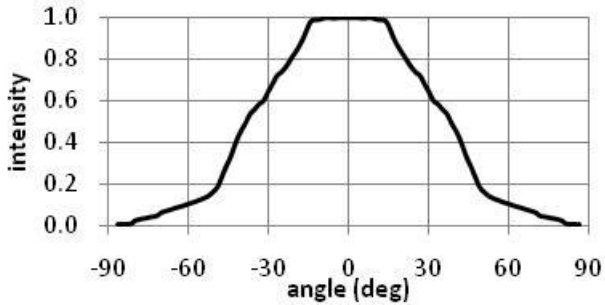
<p>Figure-11 Φ3Mold (Type31)</p>	<p>Figure-12 Φ3Mold (Type33)</p> 
<p>Figure-13 Φ3Mold (Type34)</p>	<p>Figure-14 Φ3Mold (Type36)</p> 
<p>Figure-15</p>	<p>Figure-16</p>
<p>Figure-17</p>	<p>Figure-18</p>
<p>Figure-19</p>	<p>Figure-20</p>

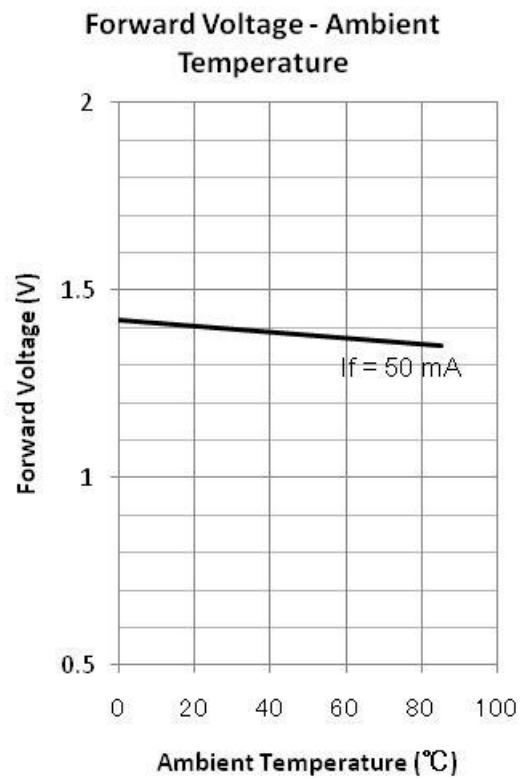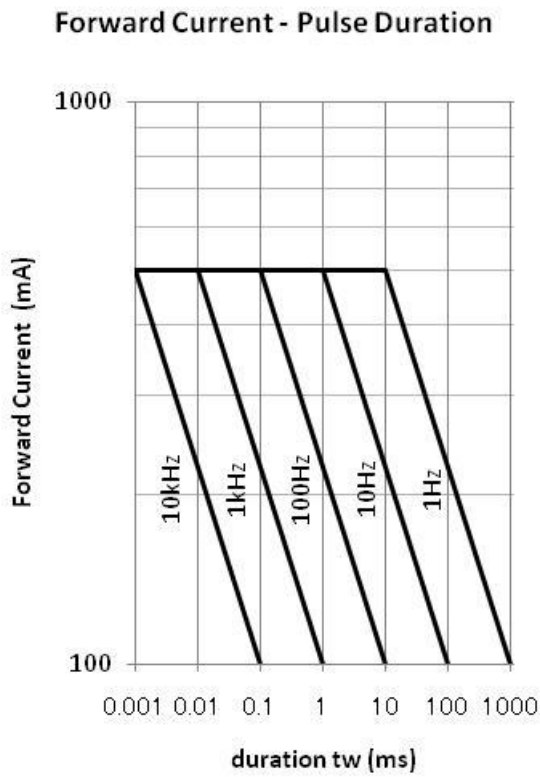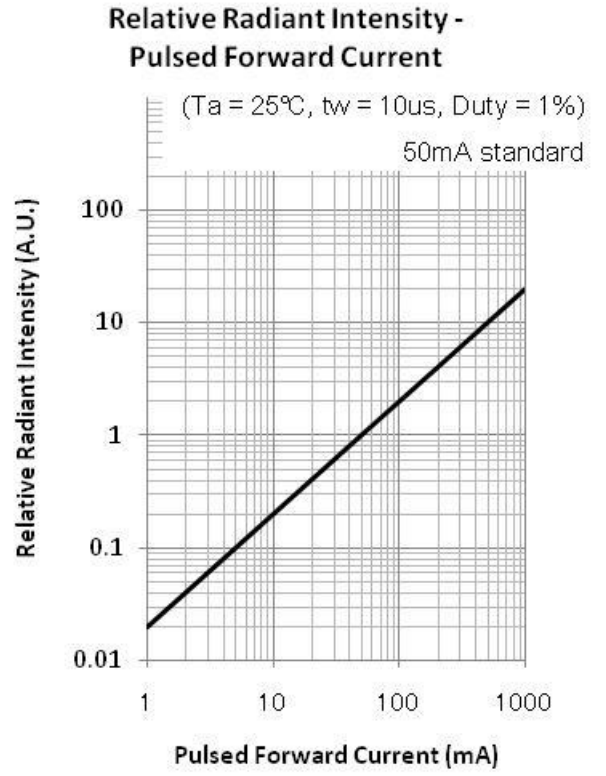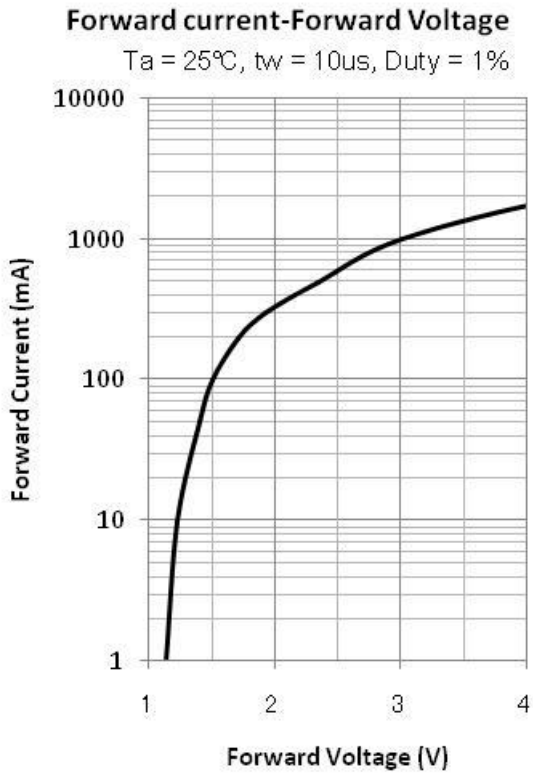

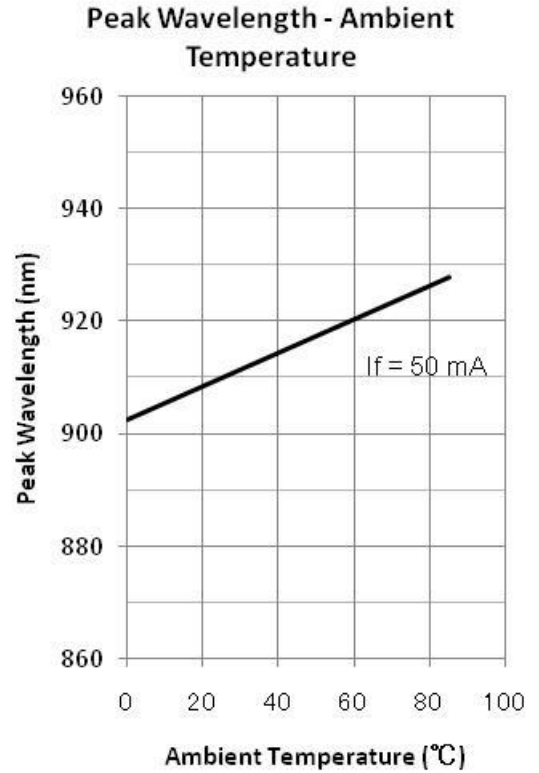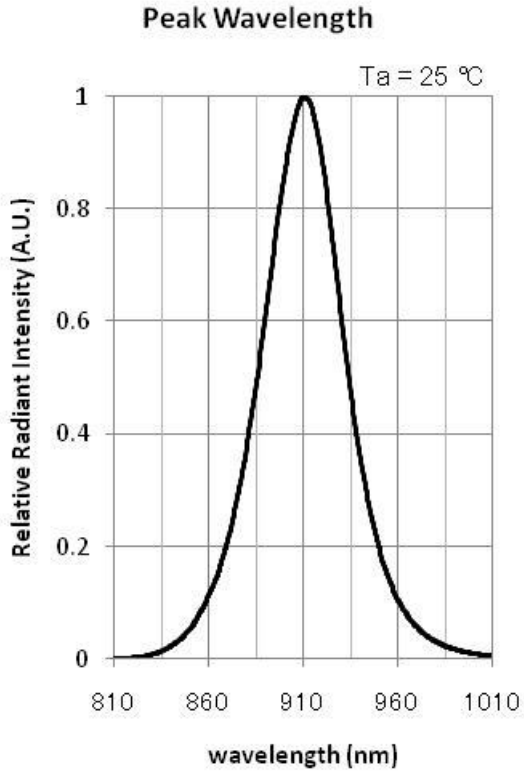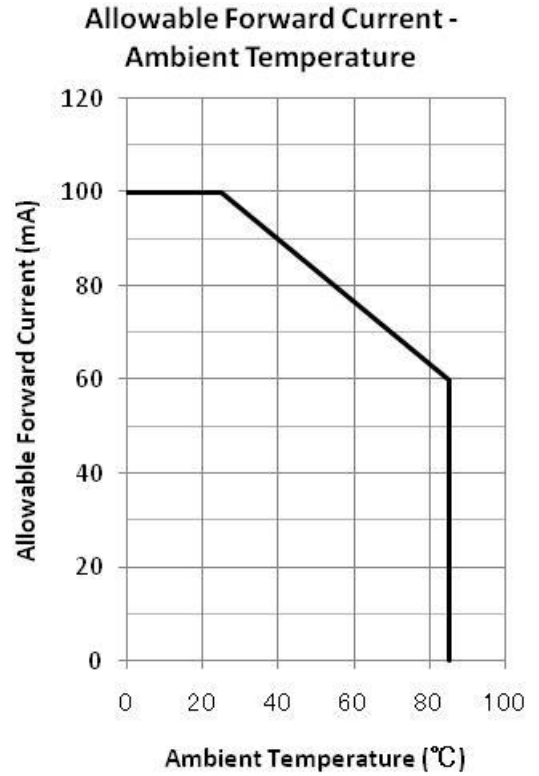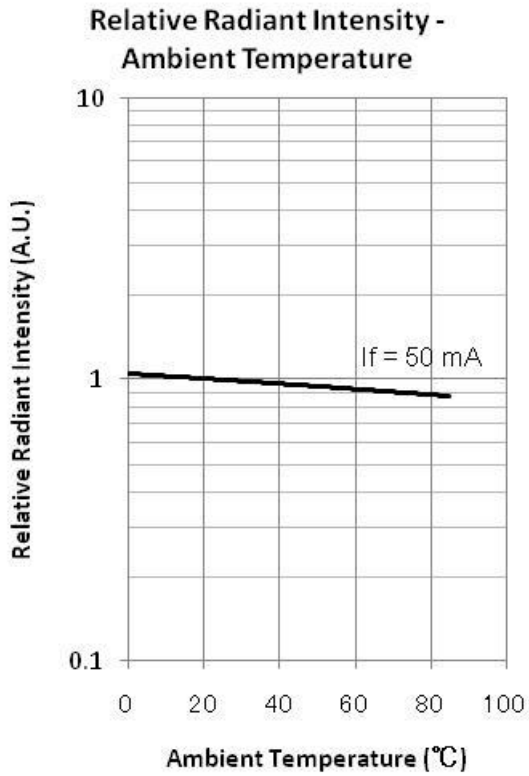

Recommended Land Layout (unit: mm)

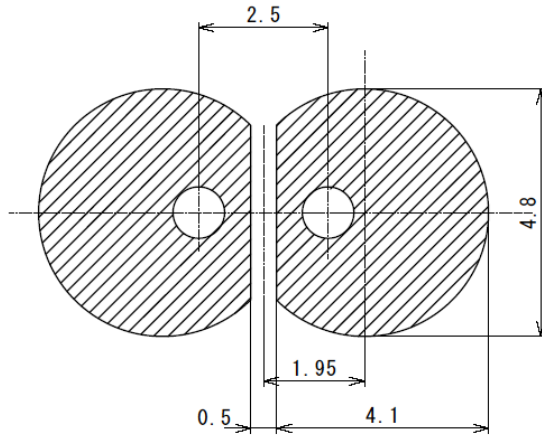

Soldering Conditions

