

PD032-01 mold type PIN-Photodiode

PD032-01 is a PIN-photodiode featuring excellent responsivity of 50ns and high photocurrent.


This PIN-photodiode consists of a large chip with 2.8mm*2.8mm active area mounted on a lead frame with a $\Phi 5$ clear epoxy lens.

These devices are designed to be easy of setting up optically with a wide angle of half sensitivity of ± 25 degrees.

◆ Specifications

- 1) Product name Mold type PIN-Photodiode
- 2) Type No. PD032-01
- 3) Chip
- (1) Chip size 3.2mm*3.2mm
- (2) Active area 2.8mm*2.8mm
- 4) Package
- (1) Type Lead frame
- (2) Resin material Epoxy resin

◆ Outer dimension (Unit: mm)

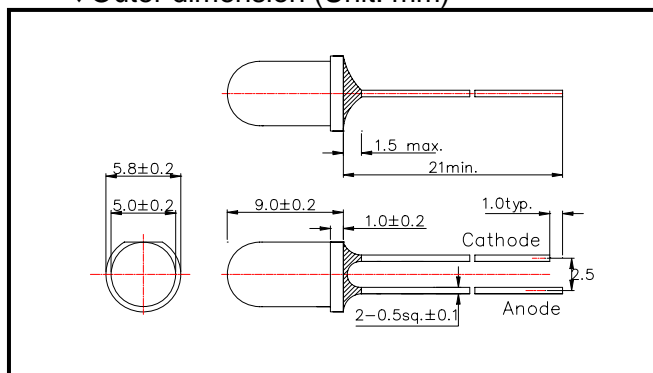

◆ Absolute Maximum Ratings [Ta=25°C]

Item	Symbol	Maximum Rated Value	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	170	V
Operating Temperature	T_{OPR}	-25 ~ +100	°C
Storage Temperature	T_{STG}	-30 ~ +125	°C
Soldering Temperature	T_{SOL}	240	°C

‡Soldering condition: Soldering condition must be completed within 2 seconds at 240°C

◆ Electro-Optical Characteristics [Ta=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	unit
Reverse Photo Current	I_L	$V_R=10V, L=1000Lx$		100		μA
Reverse Dark Current	I_D	$V_R=10V$		5	10	nA
Open Circuit Voltage	V_{OC}	$V_R=10V, L=1000Lx$		350		mV
Spectral Responsivity (Peak)	λ_P			900		nm
Half Angle of Sensitivity	$\theta_{1/2}$			± 25		deg.
Total Capacitance	C_T	$V_R=10V, f=1MHz$		25		pF
Rise/Fall Time(10%~90%)	t_r	$R_L=1K\Omega, V_R=10V$		50		ns
	t_f			50		ns