


SMB490-1100 High Power type Top LED with Lens

SMB490-1100 is an InGaN LED mounted on copper heat sink with a 5x5 mm package. These devices are available to be operated and 34,000mcd at IFP=700mA.

◆ Specifications

- 1) Product Name High Power Top LED
- 2) Type No. SMB490-1100
- 3) Chip
 - (1) Chip Material InGaAs
 - (2) Chip Dimension 1000um*1000um
 - (3) Chip Number 1pce
 - (4) Peak Wavelength 490nm typ.
- 4) Package
 - (1) Lead Frame Die Silver Plated on Copper
 - (2) Package Resin PPA Resin
 - (3) Lens Epoxy Resin

◆ Outer dimension (Unit: mm)

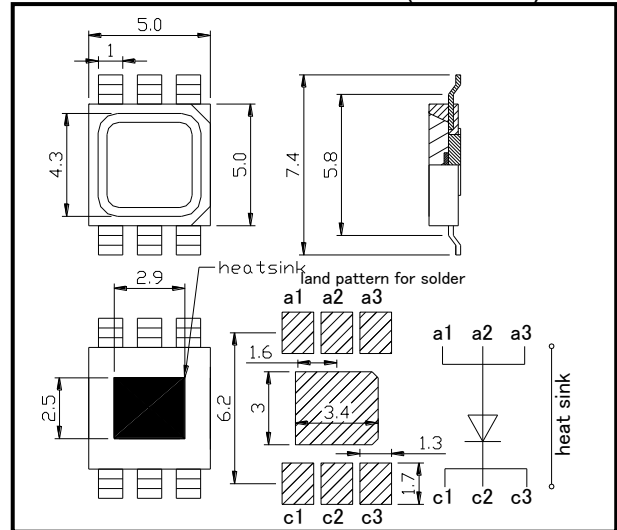

◆ Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	PD	1400	mW	Ta=25°C
Forward Current	IF	350	mA	Ta=25°C
Pulse Forward Current	IFP	700	mA	Ta=25°C
Reverse Voltage	VR	5	V	Ta=25°C
Junction Temperature	Tj	100	°C	
Operating Temperature	TOPR	-30 ~ +85	°C	
Storage Temperature	TSTG	-30 ~ +100	°C	
Soldering Temperature	TSOL	255	°C	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 5 seconds at 255°C


◆ Electro-Optical Characteristics [Ta=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=250mA		3.5	4.1	V
	VFP	IFP=700mA		4.1	4.7	
Radiated Power	Po	IF=250mA		160		mW
		IFP=700mA		450		
Brightness	Iv	IF=250mA		12000		mcd
		IFP=700mA		34000		
Radiant Intensity	IE	IF=250mA		45		mW/sr
		IFP=700mA		130		
Wavelength	Peak	IF=50mA		490		nm
	Dominant			493		
Half Width	Δλ	IF=50mA		27		nm
Viewing Half Angle	θ 1/2	IF=50mA		±66		deg.
Rise Time	tr	IF=50mA		400		ns
Fall Time	tf	IF=50mA		40		ns


‡Radiated Power is measured by S3584-08.

‡Brightness is measured by Tektronix J-6512.


Forward Current - Forward Voltage

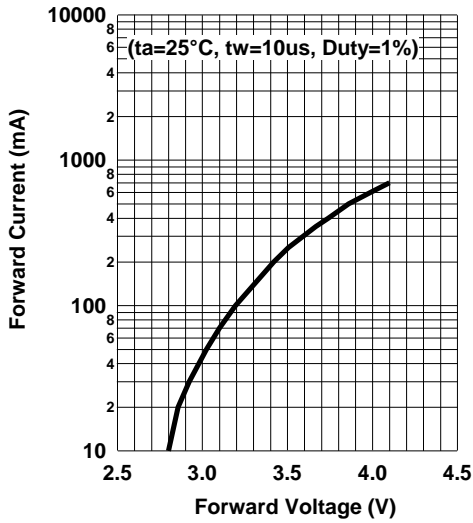


Relative Radiant Intensity - Forward Current

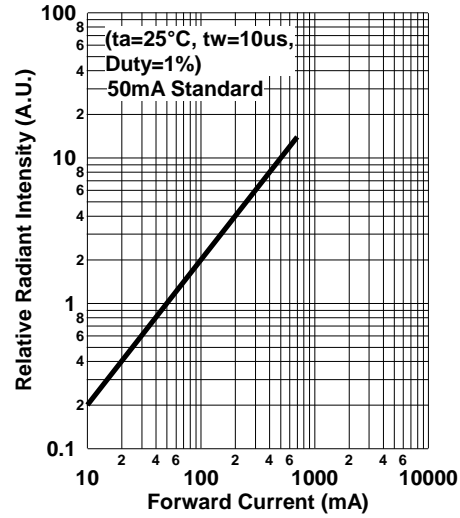


Allowable Forward Current - Ambient Temperature



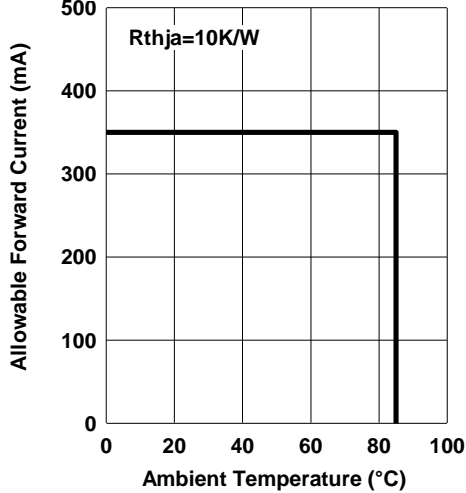


Forward Current-Pulse Duration

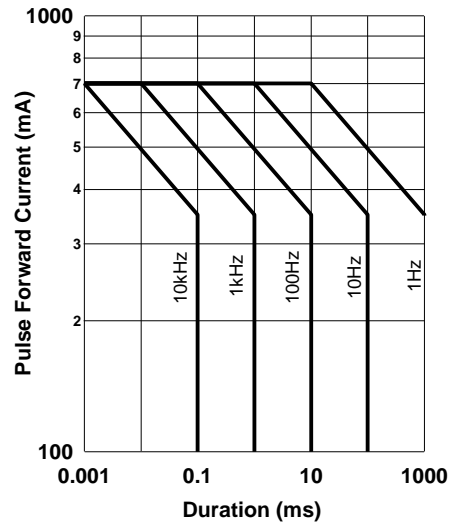

Relative Spectral Emission






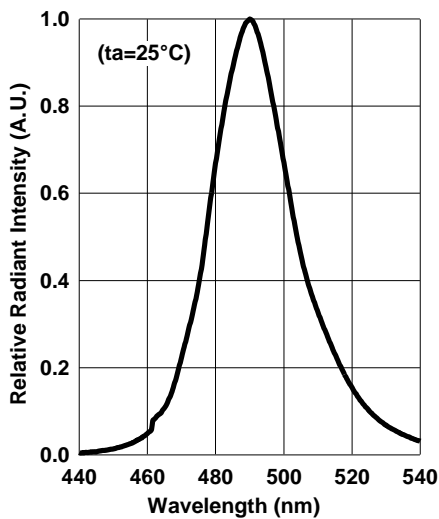


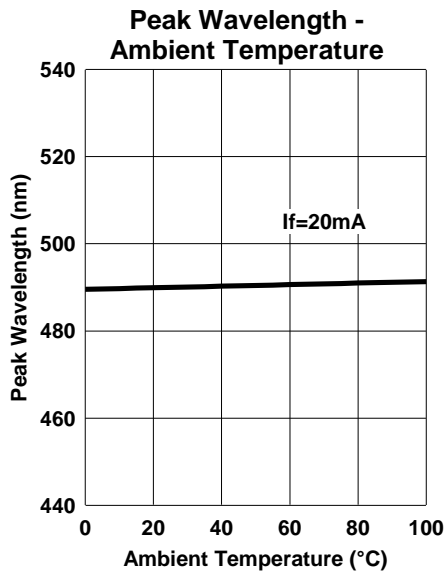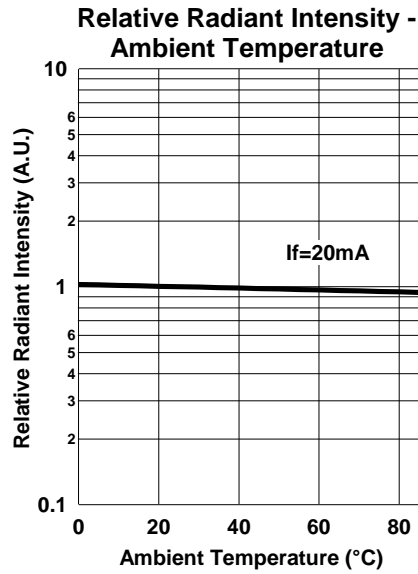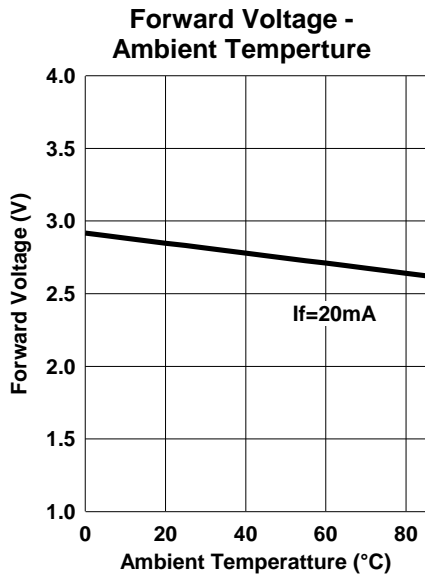



◆ Wrapping

Moisture barrier bag aluminum laminated film with a desiccant to keep out the moisture absorption during the transportation and storage.

Radiation Pattern

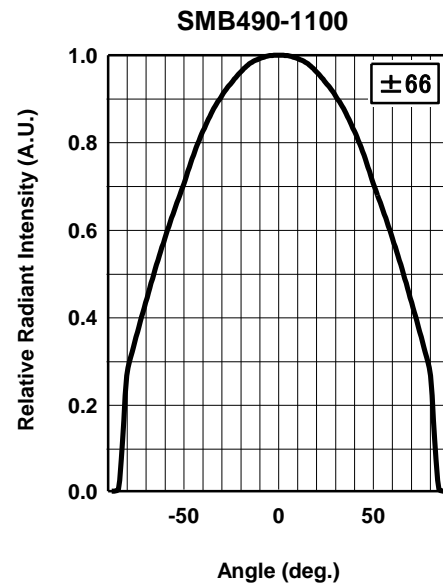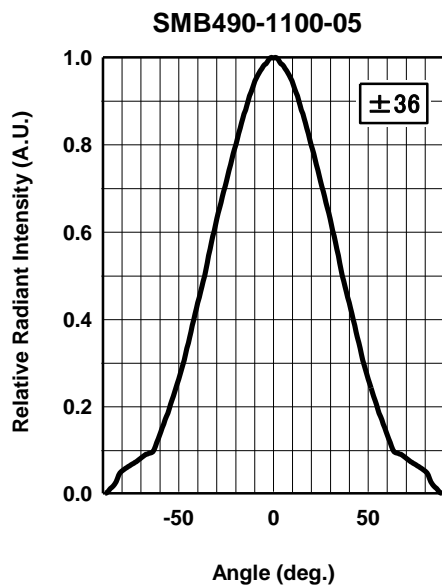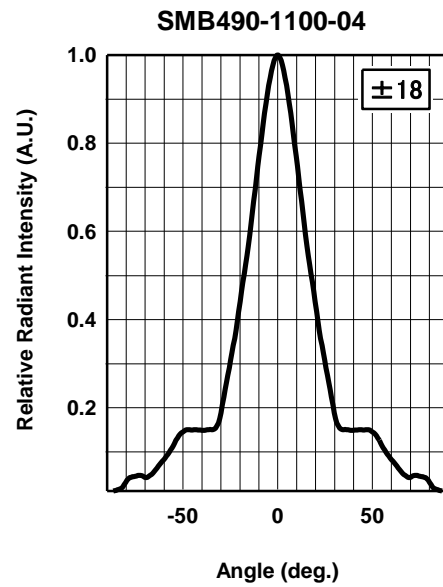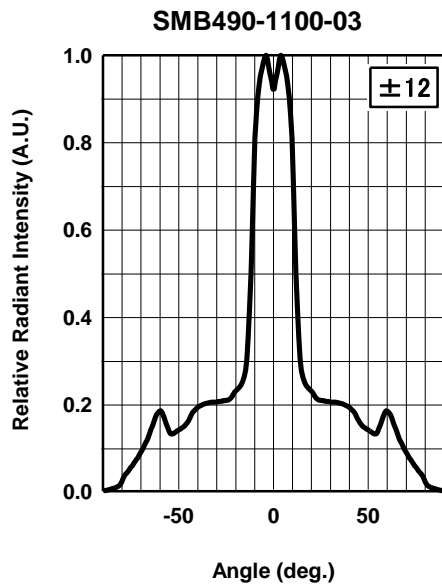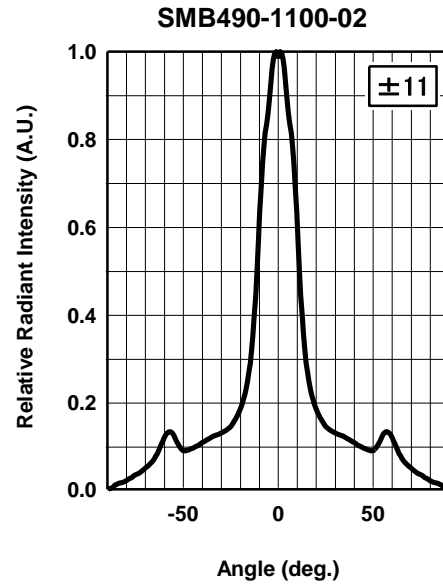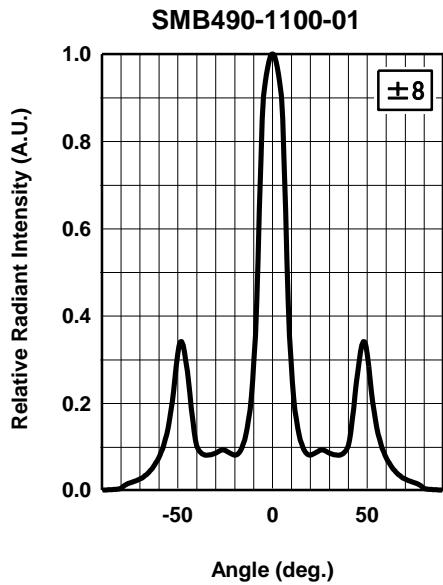

Radiation Pattern

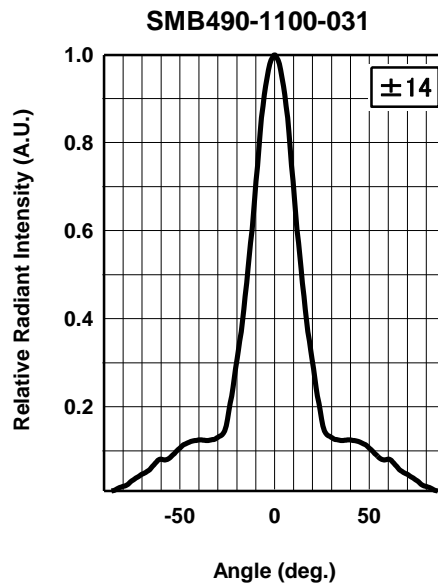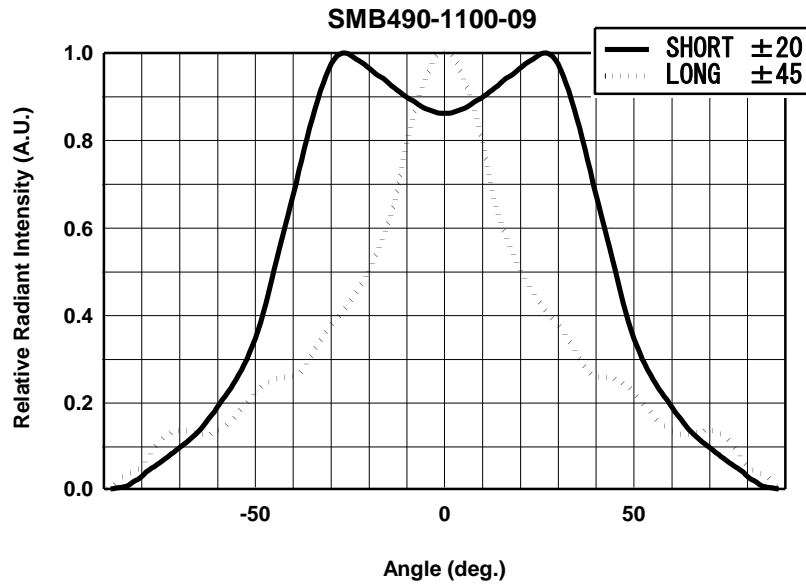

SMD LED STORAGE AND HANDLING PRECAUTIONS

< Storage Conditions before Opening a Moisture-Barrier Aluminum Bag >

- Before opening a moisture-barrier aluminum bag, please store it at <30°C, <60%RH. Please note that the maximum shelf life is 12 months under these conditions.

< Storage Conditions after Opening a Moisture-Barrier Aluminum Bag >

- After opening a moisture-barrier aluminum bag, store the aluminum bag and silica gel in a desiccator.
- After opening the bag, please solder the LEDs within 48 hours in a room with 5 - 30°C, <50%RH.
- Please put any unused, remaining LEDs and silica gel back in the same aluminum bag and then vacuum-seal the bag.
- It is recommended to keep the re-sealed bag in a desiccator at <30%RH.

< Notes about Re-sealing a Moisture-Barrier Aluminum Bag >

- When vacuum-sealing an opened aluminum bag, if you find the moisture-indicator of the silica gel has changed to pink from blue (indicating a relative humidity of 30 % or more), please do not use the unused LEDs, the aluminum bag, or the silica gel.

< Notes about Opening a Re-sealed Moisture-Barrier Aluminum Bag >

- When opening a vacuumed and re-sealed aluminum bag in order to use the remaining LEDs stored in the bag, if you find that the moisture-indicator of the silica has changed to pink, please do not use the LEDs.

※The 48-hour-long floor life does not include the time while LEDs are stored in the moisture-barrier aluminum bag.

However, we strongly recommend to solder the LEDs as soon as possible after opening the aluminum bag.