


SMC505 High Bright Greenish Blue color SMD LED on ceramics

SMC505 consists of an InGaN LED mounted on the ceramics package and is sealed with silicone resin. It emits a spectral band of radiation at 505nm.

◆ Specifications

- 1) Product Name SMD type Blue color LED
- 2) Type No. SMC505
- 3) Chip
- (1) Chip Material InGaN
- (2) Peak Wavelength 505nm typ.
- 4) Package
- (1) Package Ceramics
- (2) Lens Silicone resin

◆ Outer dimension (Unit: mm)

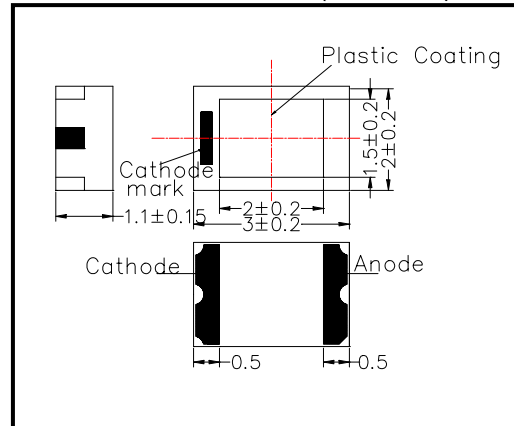

◆ Absolute Maximum Rating

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P _D	120	mW	T _a =25°C
Forward Current	I _F	30	mA	T _a =25°C
Reverse Voltage	V _R	5	V	T _a =25°C
Operating Temperature	T _{OPR}	-20 ~ +85	°C	
Storage Temperature	T _{STG}	-30 ~ +100	°C	
Soldering Temperature	T _{SOL}	220	°C	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 3 seconds at 220°C

◆ Electro-Optical Characteristics [T_a=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F =20mA		3.5	4.30	V
Reverse Current	I _R	V _R =5V			10	uA
Total Radiated Power	P _O	I _F =20mA		1.0		mW
Brightness	I _V	I _F =20mA		75		mcd
Radiant Intensity	I _E	I _F =20mA		0.3		mW/sr
Peak Wavelength	λ _P	I _F =20mA	495	505	515	nm
Half Width	Δλ	I _F =20mA		30		nm
Viewing Half Angle	θ _{1/2}	I _F =20mA		±55		deg.

‡Total Radiated Power is measured by Photodyne #500

‡Radiant Intensity is measured by Tektronix J-6512.