

L365RC-01Z**UV LED Lamp with UV Resistant Resin**

L365RC-01Z is an AlGaIn LED mounted on a lead frame with UV resistant resin.


On forward bias, it emits a band of UV light that peaks 365nm.

This UV series is designed for long life under UV beam and protected from reverse voltage by zener diode.

<Specifications>

1. Product Name: UV LED Lamp
2. Type Number: L365RC-01Z
3. Chip:
 - Chip material: AlGaIn
 - Peak Wavelength: 365nm typ.
4. Package
 - Type: Φ5mm clear molding
 - Resin Material: UV Resin
 - Lead Frame: Soldered(Lead Free)

Outer Dimension (Unit:mm)

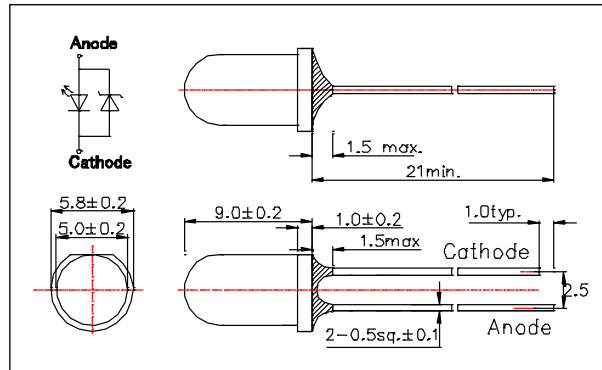

Absolute Maximum Ratings[Ta=25°C]			
Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	200	mW
Forward Current	IF	50	mA
Pulse Forward Current*	IFP	100	mA
Reverse Voltage	VR	Not Designed for Reverse Operation	V
Thermal Resistance	Rthja	330	K/W
Junction Temperature	Tj	120	°C
Operating Temperature	TOPR	-40 ~ +100	°C
Storage Temperature	TSTG	-40 ~ +100	°C
Soldering Temperature**	TSOL	250	°C

* Duty=1% and Pulse Width=10μs


** Soldering condition must be completed within 3 second at 250°C.

Electro-Optical Characteristics [Ta=25°C]						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=20mA		3.5	4.0	V
	VFP	IFP=100mA		4.0		
Radiated Power*	PO	IF=20mA		5.5		mW
		IFP=100mA		30		
Peak Wavelength	λP	IF=20mA	360	365	370	Nm
Half Width	Δλ	IF=20mA		17		nm
Viewing Half Angle	θ1/2	IF=20mA		±7		deg
Rise Time	tr	IF=20mA		50		Ns
Fall Time	tr	IF=20mA		55		ns


* Measured by S3584-08




Forward Current - Forward Voltage

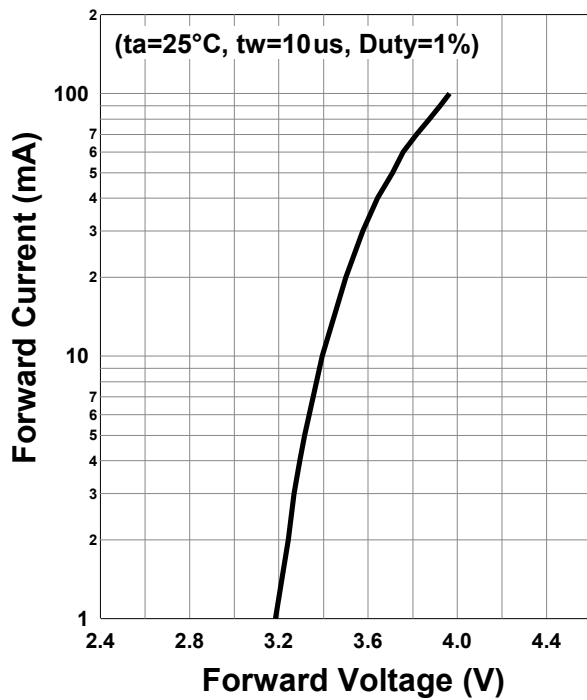


Relative Radiant Intensity - Forward Current



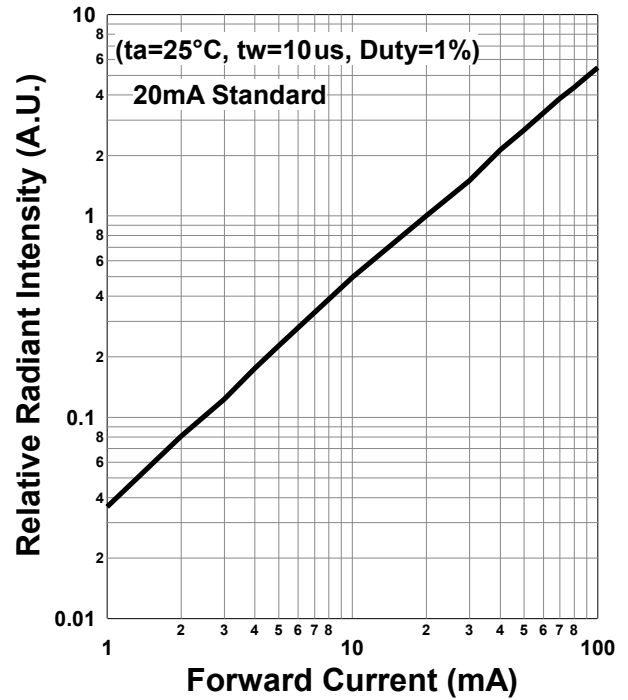


Forward Current - Pulse Duration

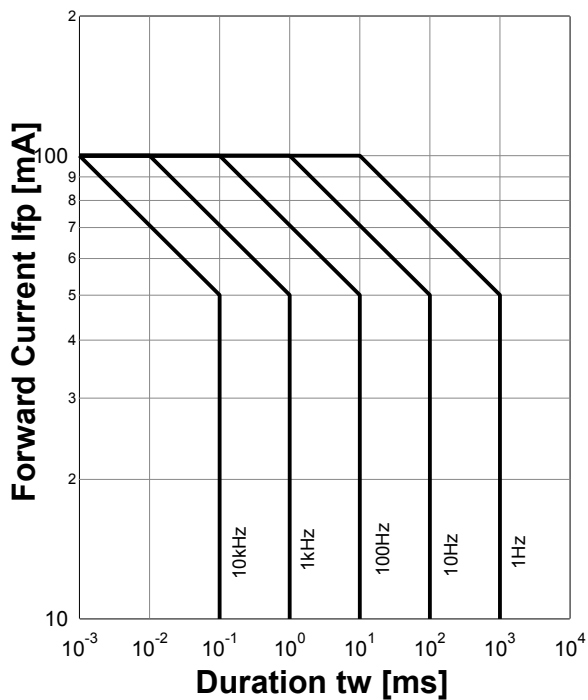


Allowable Forward Current - Ambient Temperature

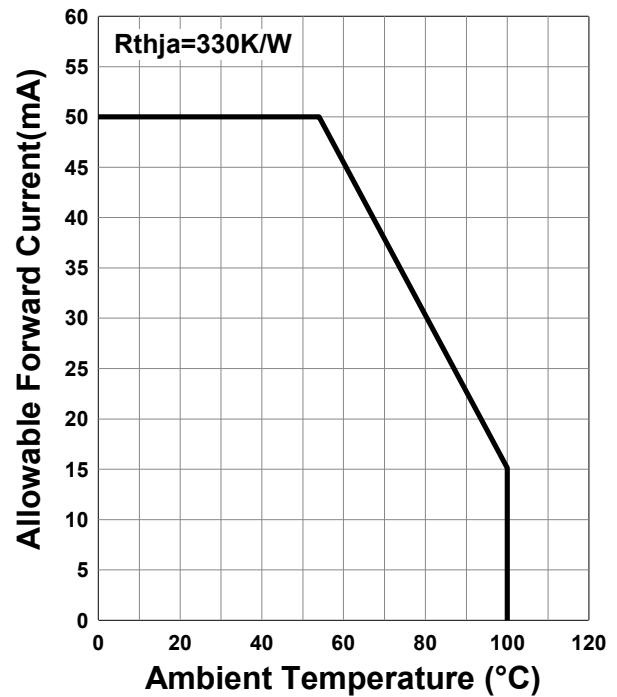


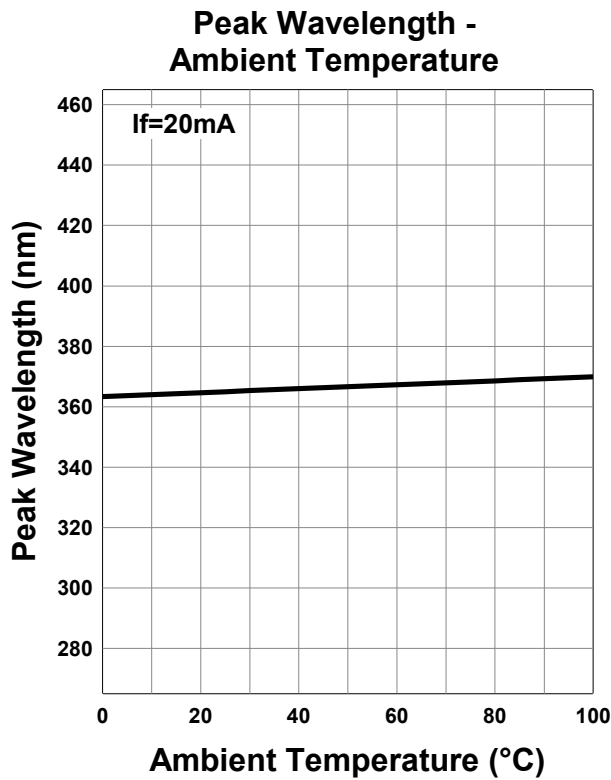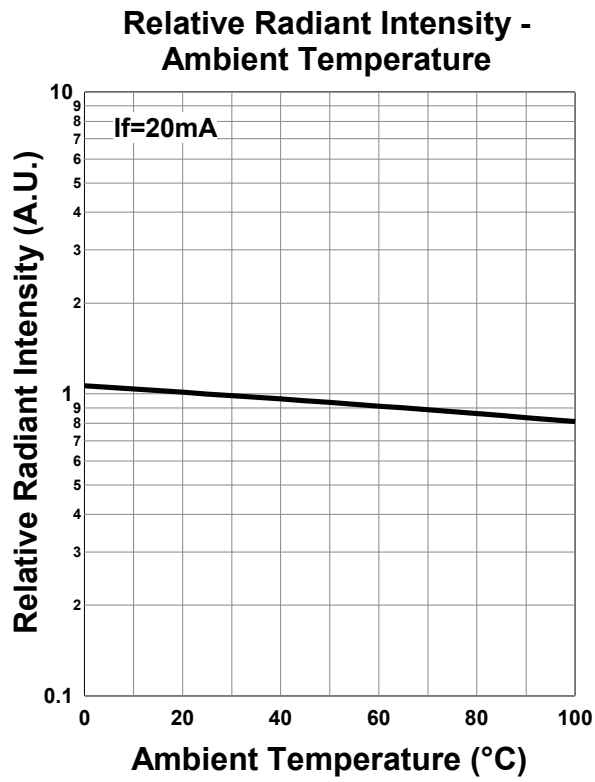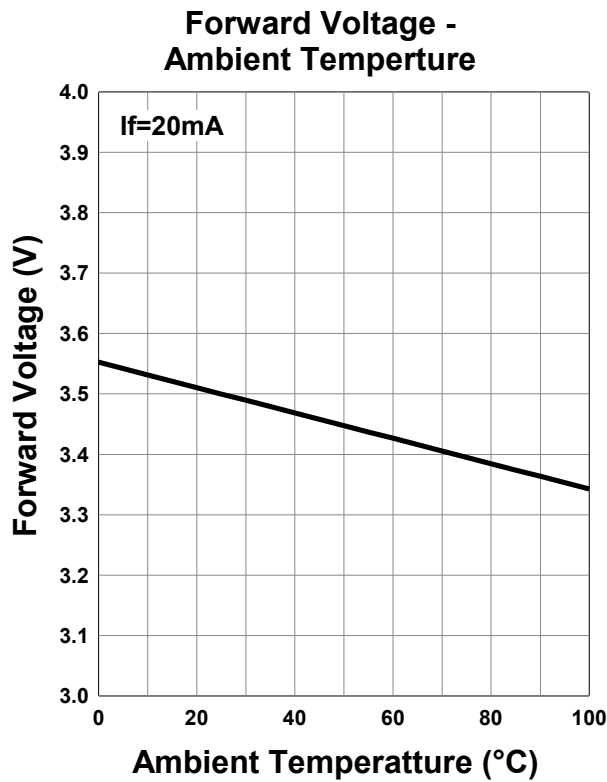


Relative Spectral Emission

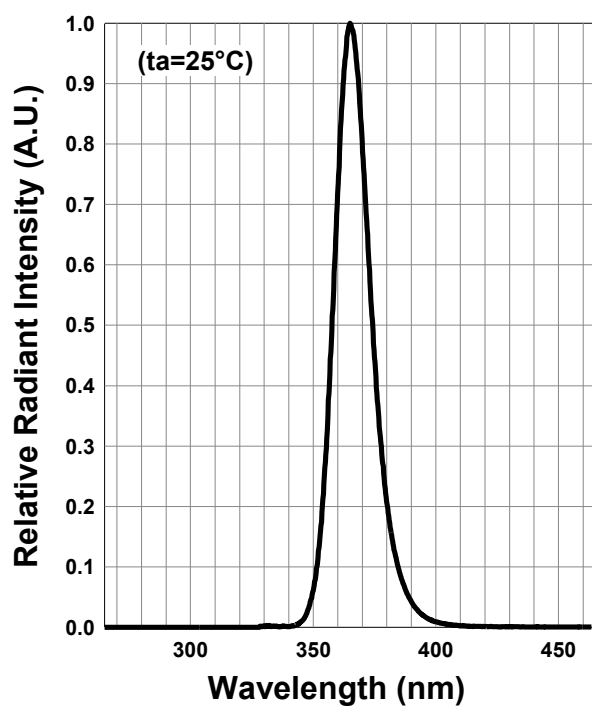

Radiation Characteristics

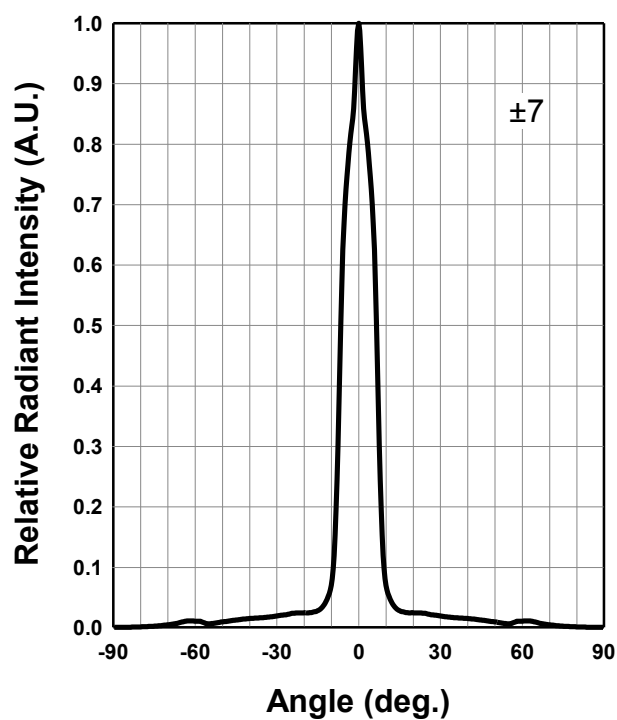

Radiation Characteristics

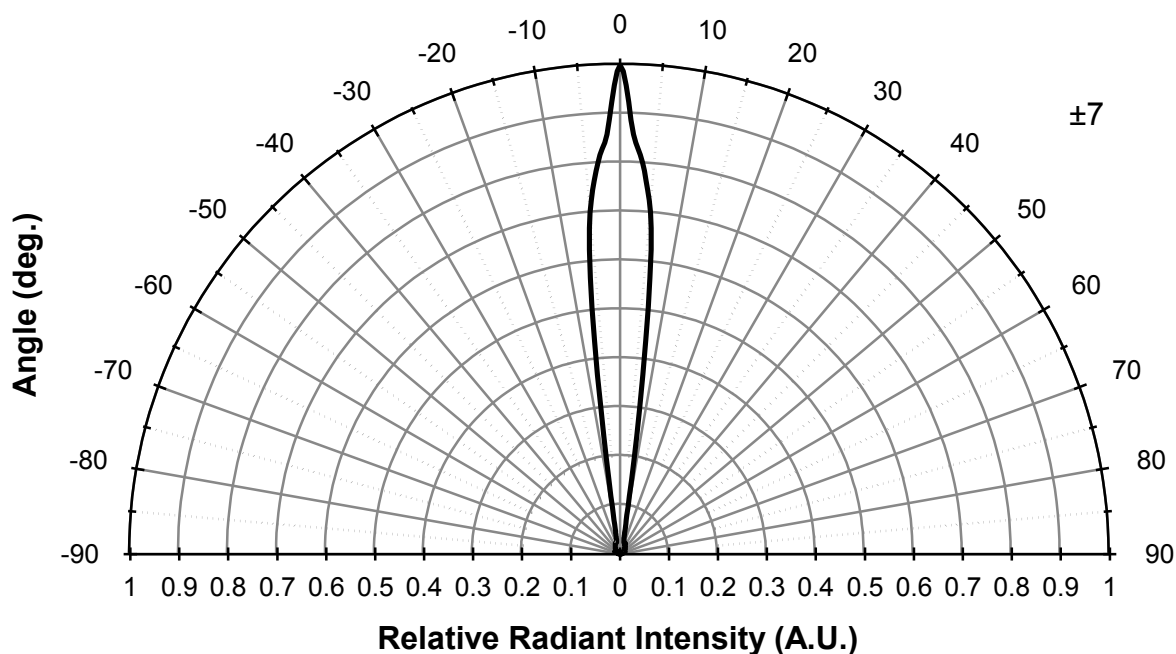

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements. Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.

2014.07