


**L565-06U**  
High Bright Green LED Lamp

L565-06U is an GaP LED mounted on a lead frame with a clear epoxy resin. On forward bias, it emits a band of visible light that peaks 565nm.

<Specifications>

1. Product Name: Green LED Lamp
2. Type Number: L565-06U
3. Chip:
  - Chip material: GaP
  - Peak Wavelength: 565nm typ.
4. Package
  - Type: Φ5mm Clear Molding
  - Resin Material: Epoxy Resin
  - Lead Frame: Soldered(Lead Free)

Outer Dimension (Unit:mm)

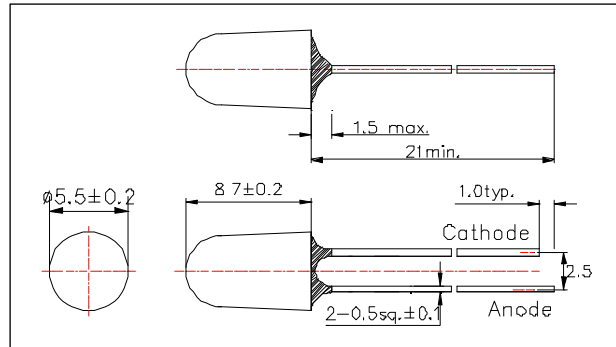

Absolute Maximum Ratings				
Item	Symbol	Maximum Rated Value	Unit	Ambient Temp.
Power Dissipation	PD	130	mW	Ta=25°C
Forward Current	IF	50	mA	Ta=25°C
Reverse Voltage	VR	5	V	Ta=25°C
Operating Temperature	TOPR	-30 ~ +85	°C	
Storage Temperature	TSTG	-30 ~ +100	°C	
Soldering Temperature*	TSOL	260	°C	

\* Soldering condition must be completed within 3 second at 260 °C.

Electro-Optical Characteristics [Ta=25°C]						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=20mA		2.2	2.4	V
Reverse Current	IR	VR=5V			10	uA
Total Radiated Power*	PO	IF=20mA		0.20		mW
Brightness**	IV	IF=20mA		1000		mcd
Radiant Intensity	IE	IF=20mA		0.1		mW/sr
Peak Wavelength	λP	IF=20mA	555	565	575	nm
Half Width	Δλ	IF=20mA		25		nm
Viewing Half Angle	θ1/2	IF=20mA		±6		deg

\* Measured by Photodyne #500

\*\* Measured by Tektronix J-16

