

L660/910-04A

Bi-Color LED for Medical Analysis

L660/910-04A consists of AlGaAs LEDs mounted on a lead frame with a clear epoxy lens. On forward bias, it emits a band of visible light which peaks 660nm and 910nm at anode common.


<Features>

- High Reliability
- High Power
- Anode Common

<Specifications>

1. Product Name: Bi-Color LED
2. Type Number: L660/910-04A
3. Chip:
 - Chip material: AlGaAs(sub-peak free)
 - Peak Wavelength: 660nm/910nm
4. Package
 - Type: Φ 5mm clear molding
 - Resin Material: Epoxy Resin
 - Lead Frame: Soldered(Lead Free)

Outer Dimension (Unit:mm)

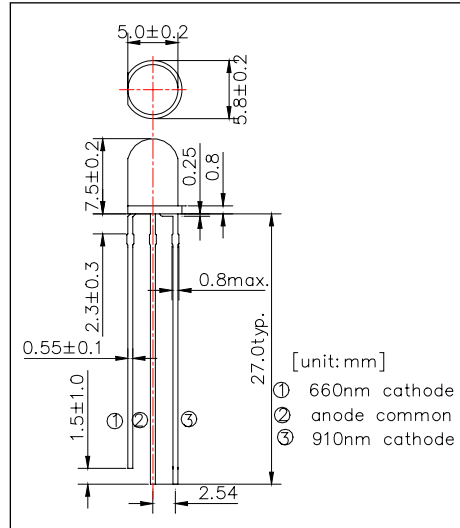

Absolute Maximum Ratings					
Item	Symbol	Maximum Rated Value		Unit	Ambient Temp.
		660nm	910nm		
Power Dissipation	PD	75	160	mW	Ta=25°C
Forward Current	IF	30	100	mA	Ta=25°C
Reverse Voltage	VR	10		V	Ta=25°C
Operating Temperature	TOPR	-30 ~ +85		°C	
Storage Temperature	TSTG	-30 ~ +100		°C	
Soldering Temperature*	TSOL	260		°C	

* Soldering condition must be completed within 3 second at 260 °C.

Electro-Optical Characteristics [Ta=25°C]									
Item	Symbol	Condition	Minimum		Typical		Maximum		Unit
			660	910	660	910	660	910	
Forward Voltage	VF	IF=20mA			1.9	1.3	2.2	1.5	V
Reverse Current	IR	VR=5V					10		uA
Total Radiated Power*	PO	IF=20mA	2.5	1.5	4.5	2.5			mW
Peak wavelength	λ P	IF=20mA	650	900	660	910	670	930	nm
Half Width	$\Delta\lambda$	IF=20mA			20	60			nm
Viewing Half Angle	θ 1/2	IF=20mA			\pm 20				deg

* Measured by Photodyne #500

