


L660N-31-2C
Fiber Use Red LED

L660N-31-2C is an AlGaInP LED mounted on a lead frame with a clear epoxy flat lens. On forward bias, it emits a band of visible light that peaks 660nm.

<Specifications>

1. Product Name: Red LED Lamp
2. Type Number: L660N-31-2C
3. Chip:
 - Chip material: AlGaInP
 - Peak Wavelength: 660nm type
4. Package
 - Type: Φ3mm Clear Molding
 - Resin Material: Epoxy Resin
 - Lead Frame/Cup: 0.35mm Depth
 - Lead Frame: Soldered(Lead Free)

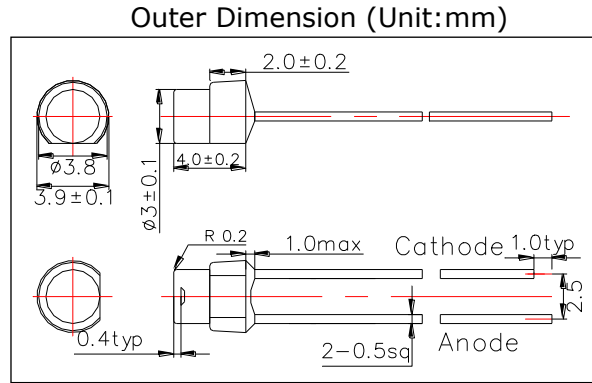

Absolute Maximum Ratings[Ta=25°C]			
Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	120	mW
Forward Current	IF	50	mA
Pulse Forward Current*	IFP	200	mA
Reverse Voltage	VR	5	V
Junction Temperature	Tj	100	°C
Thermal Resistance**	Rthjp	240	K/W
Operating Temperature	TOPR	-40 ~ +80	°C
Storage Temperature	TSTG	-40 ~ +100	°C
Soldering Temperature***	TSOL	265	°C

* Duty=1% and Pulse Width=10us.

** Junction - ambient, leads 7mm, soldered on PCB.

*** Soldering condition must be completed within 3 second at 265°C.

Electro-Optical Characteristics [Ta=25°C]						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=20mA		2.1	2.3	V
Total Radiated Power*	PO	IF=20mA	6	12		mW
Radiant Intensity**	IE	IF=20mA		4		mW/sr
Brightness	IV	IF=20mA		-		mcd
Wavelength	Peak	IF=20mA	650	660	670	nm
	Dominant			644		
Half Width	Δλ	IF=20mA		20		nm
Viewing Half Angle	θ1/2	IF=20mA		± 50		deg

* Measured by Photodyne #500

** Measured by Tektronix J-6512

