

L850-06LH


Infrared LED Lamp

L850-06LH(LN850-06LH) is composed of rectangular AlGaAs die and is mounted on a lead frame with a clear unspherical epoxy lens.
On forward bias, it emits a spectral band of radiation that peaks at 850nm.

<Specifications>

1. Product Name: Infrared LED Lamp
2. Type Number: L850-06LH
3. Chip:
 - Chip material: AlGaAs
 - Dimension: 680um x 240um
 - Electrode: Bar Shape
 - Peak Wavelength: 850nm typ.
4. Package
 - Type: Φ5mm Clear Molding
 - Resin Material: Epoxy Resin
 - Lead Frame: Soldered(Lead Free)

Outer Dimension (Unit:mm)

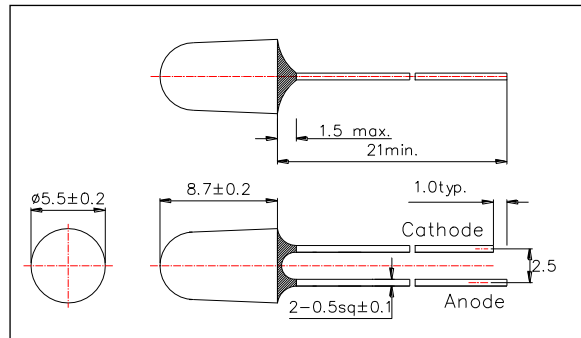

Absolute Maximum Ratings[Ta=25°C]			
Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	160	mW
Forward Current	IF	100	mA
Pulse Forward Current*	IFP	1000	mA
Reverse Voltage	VR	5	V
Operating Temperature	TOPR	-30 ~ +85	°C
Storage Temperature	TSTG	-30 ~ +100	°C
Soldering Temperature**	TSOL	260	°C

* Duty=1% and Pulse Width=10us.

** Soldering condition must be completed within 3 second at 260 °C.

Electro-Optical Characteristics [Ta=25°C]						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=50mA		1.46	1.60	V
Reverse Current	IR	VR=5V			10	uA
Total Radiated Power*	PO	IF=50mA	18	22		mW
Radiant Intensity**	IE	IF=50mA	80	100		mW/sr
Peak Wavelength	λP	IF=50mA	840	850	860	nm
Half Width	$\Delta\lambda$	IF=50mA		40		nm
Viewing Half Angle	Long	$\theta_{1/2}$	IF=50mA	± 11		deg
	Short			± 6		
Rise Time	tr	IF=50mA		15		ns
Fall Time	tf	IF=50mA		10		ns

* Measured by Photodyne #500

** Measured by Tektronix J-6512

