

L1550-03


Infrared LED Lamp

L1550-03 is an InGaAsP LED mounted on a lead frame with a clear epoxy lens. On forward bias, it emits a spectral band of radiation which peaks at 1550nm.

<Specifications>

1. Product Name: Infrared LED Lamp
2. Type Number: L1550-03
3. Chip:
 - Chip material: InGaAsP
 - Peak Wavelength: 1550nm typ.
4. Package
 - Type: $\Phi 5\text{mm}$ Clear Molding
 - Resin Material: Epoxy Resin
 - Lead Frame: Soldered(Lead Free)

Outer Dimension (Unit:mm)

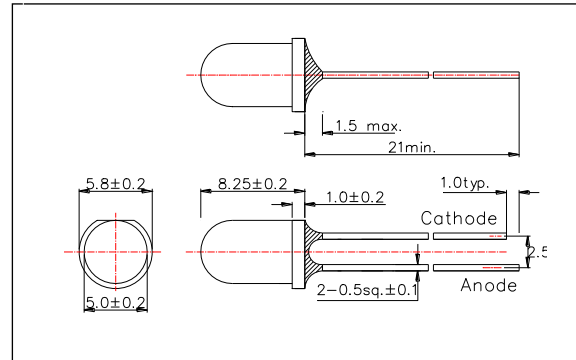

Absolute Maximum Ratings[Ta=25°C]			
Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	120	mW
Forward Current	IF	100	mA
Pulse Forward Current*	IFP	1000	mA
Reverse Voltage	VR	5	V
Operating Temperature	TOPR	-30 ~ +85	°C
Storage Temperature	TSTG	-30 ~ +100	°C
Soldering Temperature**	TSOL	260	°C

* Duty=1% and Pulse Width=10 μ s

** Soldering condition must be completed within 3 second at 260 °C.

Electro-Optical Characteristics [Ta=25°C]						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=50mA		1.0	1.5	V
Reverse Current	IR	VR=5V			10	μ A
Radiated Power*	PO	IF=50mA	0.5	1.5		mW
Peak Wavelength	λ P	IF=50mA	1500	1550	1600	nm
Half Width	$\Delta\lambda$	IF=50mA		100		nm
Viewing Half Angle	$\theta_{1/2}$	IF=50mA		± 15		deg
Rise Time	tr	IF=50mA		10		ns
Fall Time	tf	IF=50mA		10		ns

* Measured by Ando Optical Multi Meter AQ2140&AQ2742
(Total Radiated Power is measured by Photodyne #500)

