

L385-66-60

Epoxy Lens Type UV Light Illuminator

L385-66-60 is a wide viewing and extremely high output power illuminator assembled with a total of 60 high efficiency InGaN UV diode chips, mounted on a metal stem TO-66 and covered with double coated clear silicone and epoxy resin.


<Features>

- High Reliability
- Compact(TO-66) Package
- High Output Power at 385nm

<Specifications>

1. Product Name: UV Light Illuminator
2. Type Number: L385-66-60
3. Chip:
 - Chip material: InGaN
 - Peak Wavelength: 385nm typ.
4. Package
 - Type: TO-66 Stem
 - Lens: Clear Silicone and Epoxy Lens

Outer Dimension (Unit:mm)

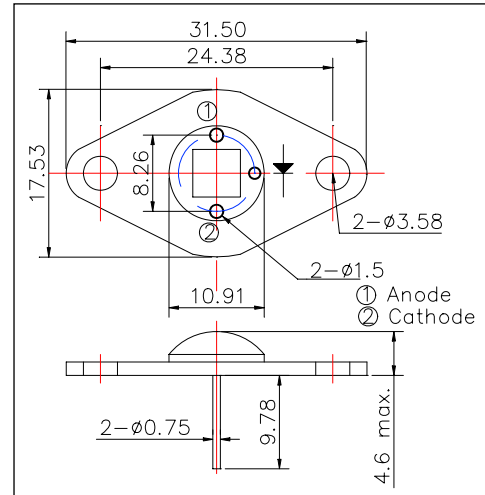

Absolute Maximum Ratings[Ta=25°C]			
Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	5.0	W
Forward Current	IF	300	mA
Reverse Voltage	VR	20	V
Operating Temperature	TOPR	-30 ~ +80	°C
Storage Temperature	TSTG	-30 ~+100	°C
Soldering Temperature*	TSOL	240	°C

* Soldering condition must be completed within 3 second at 260 °C.

Electro-Optical Characteristics [Ta=25°C]						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=200mA		17.0		V
Brightness	IV	IF=200mA		-		mcd
Total Radiated Power*	PO	IF=200mA		150		mW
Radiant Intensity	IE	IF=200mA		-		mW/sr
Reverse Current	VR	IR=10uA	20			V
Peak Wavelength	λP	IF=200mA	375	385	395	nm
Half Width	Δλ	IF=200mA		17		nm
Viewing Half Angle	θ1/2	IF=200mA		±55		deg

* Measured by Ando Optical Multi Meter AQ2140&AQ2741

Heat sink is required thermal resistance <8K/W

