

Mechanical Specifications and Materials (Unit:mm)

Part Number



265nm: DF7VL-1H41

280nm: DF8VL-1H41

310nm: UF1VL-1H41

325nm: UF3VL-1H41

340nm: UF4VL-1H41

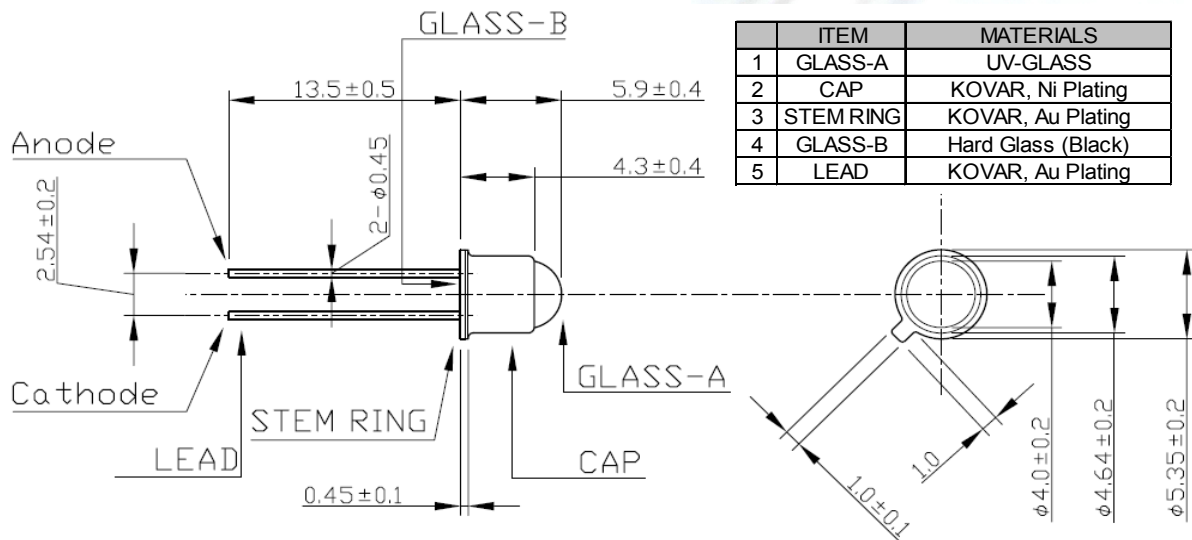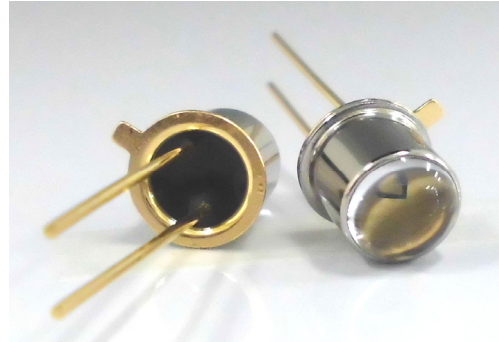

Typical Optical-Electrical Characteristics ($I_F=20\text{mA}$, $T_a=25^\circ\text{C}$)


Item	Symbol	Unit	DF7VL	DF8VL	UF1VL	UF3VL	UF4VL
Peak Wavelength	λ_p	nm	265±5	280±5	310±5	325±5	340±5
Radiant Flux	P_o	mW	0.4	1.0	0.6	0.7	0.8
Full Width at Half Maximum	$\Delta\lambda$	nm	10	10	10	9	9
Forward Voltage	V_F	V	10	7	7	5	4
Response*	rise time	tr	ns	-	16	20	12
	fall time	tf	ns	-	8	9	8
Viewing Half Angle	$2\theta_{1/2}$	deg.	40	40	40	40	40

*Test condition : Frequency=100kHz, duty=1%, $I_{fp}=200\text{mA}$


Absolute Maximum Ratings

Item	Symbol	Unit	Ambient Temperature
Forward Current	I_{Fmax}	mA	$T_a=25^\circ\text{C}$
Operating Temperature	T_{OPR}	$^\circ\text{C}$	-30 ~ +80
Storage Temperature	T_{STG}	$^\circ\text{C}$	-40 ~ +100
Soldering Temperature	T_{SOL}	$^\circ\text{C}$	300 (within 5sec)


Forward Current vs Forward Voltage

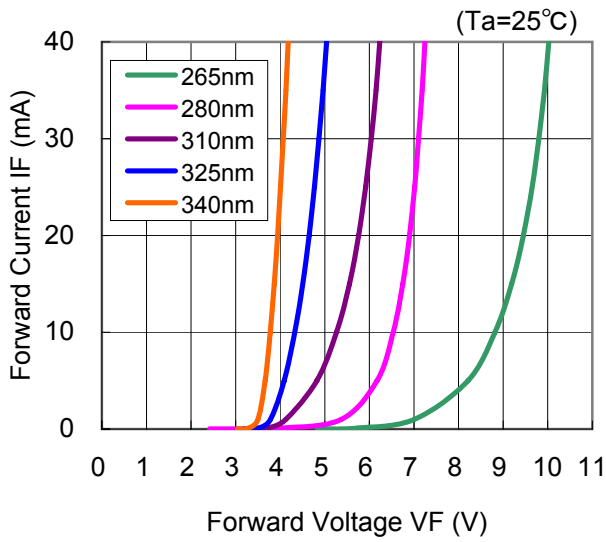


Forward Current vs Radiant Flux

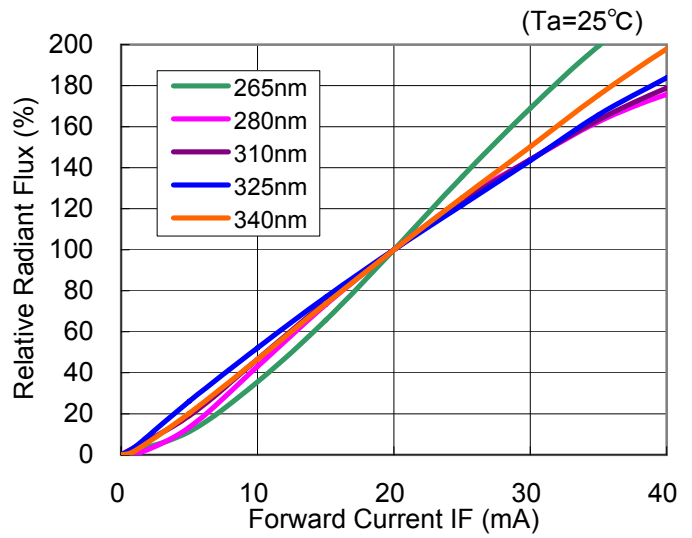

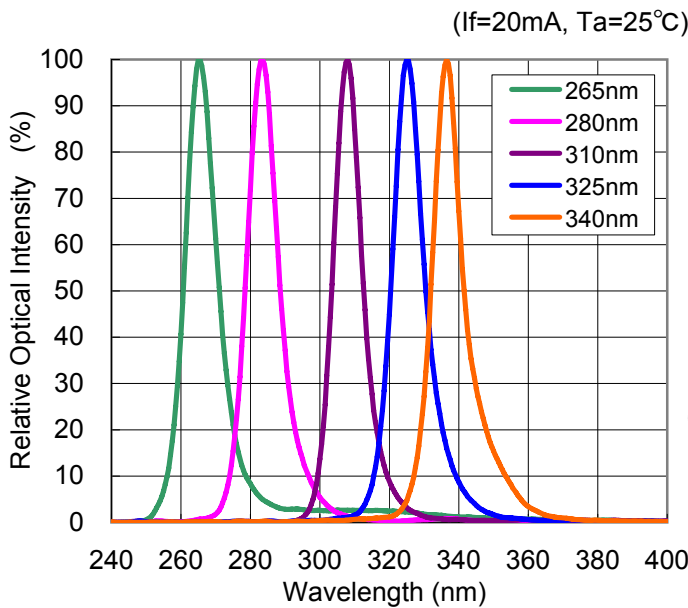

Relative Intensity vs Peak Wavelength

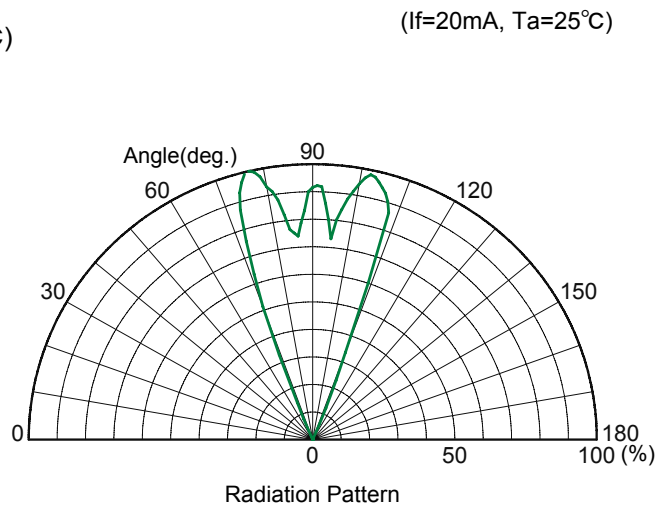


Radiation Pattern




	 CAUTION
	<ul style="list-style-type: none"> • LEDs emit very strong UV radiation. • Don't look directly into the LED light. UV radiation can harm your eyes. • To prevent even inadequate exposure, wear protective eyewear. • If LEDs are embedded in devices, please indicate warning labels against the UV light LED used. • Keep out of reach of children. • Specification and dimension are subject to change for improvement without notice.


Radiant Flux vs Ambient Temperature

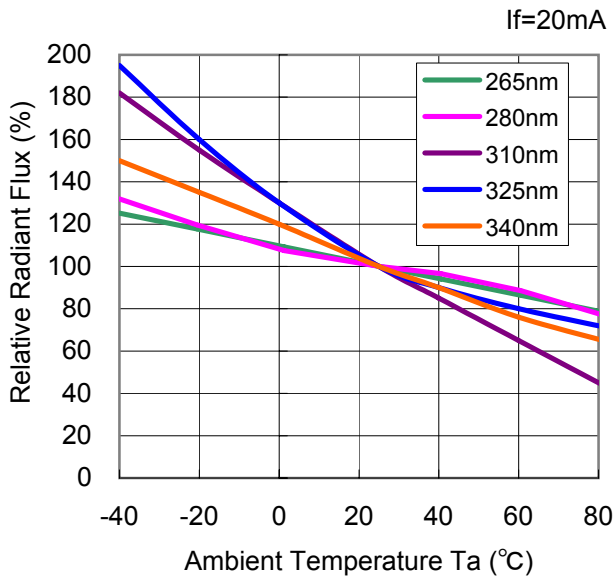


Voltage Shift vs Ambient Temperature

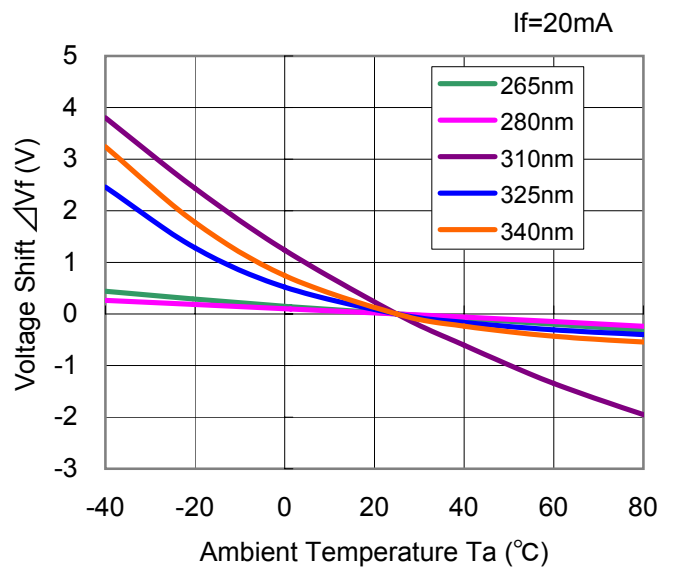

Wavelength Shift vs Ambient Temperature

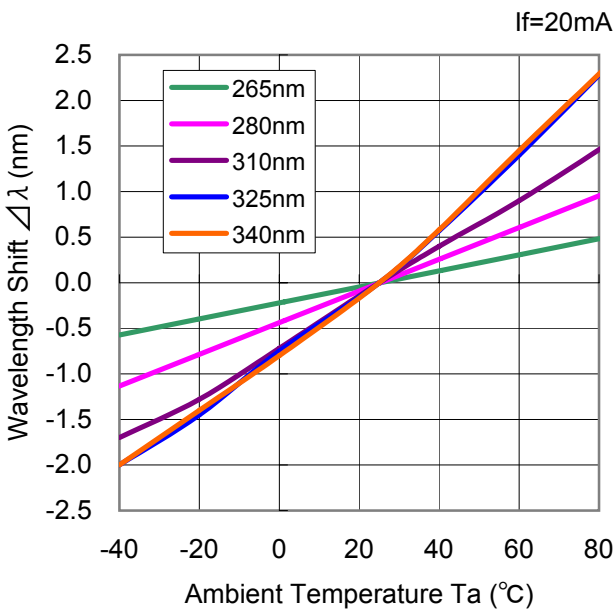

Junction Temperature vs Forward Current

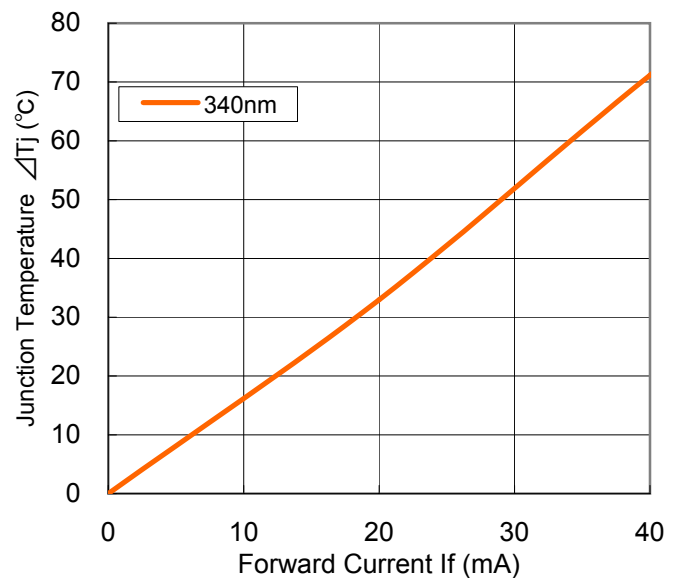

Issued Jul. 2013.

SPEC information (included design, dimension, and typical data) would be changed without prior notice.

Lead (Pb) Free Product – RoHS Compliant