

## L750-40M32

### Stem Type LED with Ball Lens

L750-40M32 is an AlGaAs LED mounted on a TO-18 stem with a ball glass lens. It is designed for high beam use. On forward bias, it emits a spectral band of radiation which peaks at 750nm.


**<Features>**

- High Radiated Intensity
- High Reliability

**<Specifications>**

1. Product Name: Infrared LED Lamp
2. Type Number: L750-40M32
3. Chip:
  - Chip material: AlGaAs
  - Peak Wavelength: 750nm
4. Package
  - Type: TO-18 Stem
  - Lens: Ball Glass Lens
  - Cap: Gold Plated

Outer Dimension (Unit:mm)

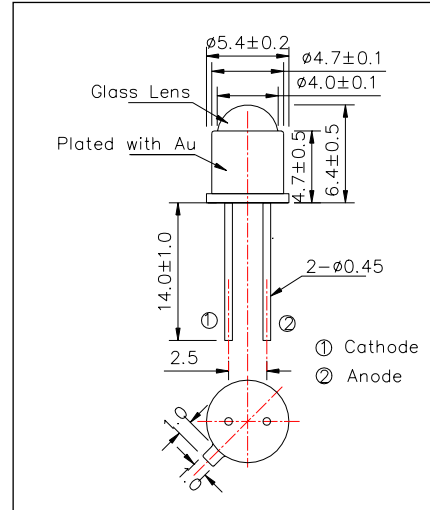

Absolute Maximum Ratings				
Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	PD	200	mW	Ta=25°C
Forward Current	IF	100	mA	Ta=25°C
Pulse Forward Current*	IFP	500	mA	Ta=25°C
Reverse Voltage	VR	5	V	Ta=25°C
Operating Temperature	TOPR	-30 ~ +90	°C	
Storage Temperature	TSTG	-30 ~ +100	°C	
Soldering Temperature**	TSOL	260	°C	

\* Duty=1% and Pulse Width=10μs.

\*\* Soldering condition must be completed within 3 second at 260 °C.

Electro-Optical Characteristics						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=50mA		1.85	2.00	V
Reverse Current	IR	VR=5V			10	uA
Total Radiated Power*	PO	IF=50mA	7	12		mW
Radiant Intensity**	IE	IF=50mA		50		mW/sr
Peak Wavelength	λP	IF=50mA	730	750	770	nm
Half Width	Δλ	IF=50mA		30		nm
Viewing Half Angle	θ1/2	IF=50mA		±10		deg
Rise Time	tr	IF=50mA		150		ns
Fall Time	tf	IF=50mA		150		ns

\* Measured by Photodyne #500

\*\* Measured by Tektronix J-6512

