

SPECIFICATION OF LED CHIP C630-55V [RED]

1) Commodity Type and Physical Characteristics.

- | | | | |
|----------------------|--------------|------------------|------------------------|
| 1. Material | InGaAlP/GaAs | | |
| 2. Electrode | Top Side | P (anode) side | :Au Alloy/Al or Au Pad |
| | Bottom Side | N (cathode) side | :Au Alloy |
| 3. Electrode Pattern | Fig.1 | | |
| 4. Chip Size | Fig.2 | | |
| 5. Chip Thickness | Fig.2 | | |
| 6. Emission Area | Fig.2 | | |

2) Electro-Optical Characteristics [Ta=25°C]

Parameters	Symbol	Condition	Min.	Type	Max.	Unit
Forward Voltage	Vf	If=20mA		1.8	2.1	V
Forward Voltage	Vfp	Ifp=500mA		3.00	4.50	V
Reverse Current	Ir	Vr=5V			10	uA
Brightness	Iv	If=20mA	70	120		mcd
Power Intensity	Po	If=20mA	0.7	1.2		mW
Peak Wavelength	λ_P	If=20mA	625	635	645	nm
Spectral Bandwidth	$\Delta\lambda$	If=20mA		15		nm
Rise Time	tr	If=20mA		100		ns
Fall Time	tf	If=20mA		100		ns

‡ Pulse Forward Current condition: Duty=1% and Pulse Width=1us.

‡ Die shall be mounted on TO=18 gold header without resin coated.

[Unit:

um]

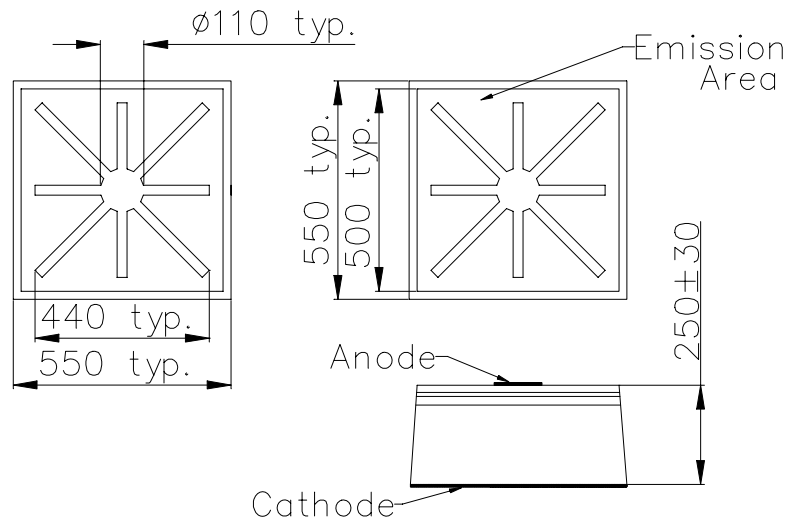


Fig.1 Electrode Pattern

Fig.2 Chip size and Emission Area