

L880-__ _AU

Infrared LED Lamp

This series of L880-__ _AU is an AlGaAs LED mounted on a lead frame and encapsulated in various types of epoxy lens which offer different design settings.

On forward bias, it emits a high power radiation of typical 25mW with a peak wavelength at 880nm.

Specifications

- | | |
|--------------------|-------------|
| 1. Chip material | AlGaAs |
| 2. Peak wavelength | 880nm |
| 3. Resin Material | Epoxy resin |
| 4. Solder | Lead free |



Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P_D	160	mW	$T_a=25^{\circ}\text{C}$
Forward Current	I_F	110	mA	$T_a=25^{\circ}\text{C}$
Pulse Forward Current	I_{FP}	1000	mA	$T_a=25^{\circ}\text{C}$
Reverse Voltage	V_R	5	V	$T_a=25^{\circ}\text{C}$
Operating Temperature	T_{OPR}	-30 ~ +85	$^{\circ}\text{C}$	$T_a=25^{\circ}\text{C}$
Storage Temperature	T_{STG}	-40 ~ +100	$^{\circ}\text{C}$	
Soldering Temperature	T_{SOL}	265	$^{\circ}\text{C}$	

Electro-Optical Characteristics ($T_a=25^{\circ}\text{C}$)

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V_F	$I_F=50\text{mA}$		1.5	1.7	V
Reverse Current	I_R	$V_R=5\text{V}$			10	μA
Total Radiated Power	P_O	$I_F=50\text{mA}$	19	25		mW
Peak Wavelength	λ_P	$I_F=50\text{mA}$		880		nm
Half Width	$\Delta\lambda$	$I_F=50\text{mA}$		40		nm
Rise Time	t_r	$I_F=50\text{mA}$		15		ns
Fall Time	t_f	$I_F=50\text{mA}$		10		ns


Characteristics of Radiant Intensity (Ta=25°C)

Type	Viewing Half Angle	Radiant Intensity I _F =50mA Unit : mW/sr			Outer Dimension	Dimension Figure
		Minimum	Typical	Maximum		
L880-01AU	±8°		100		Φ5	1
L880-02AU	±4°		150		Φ5	2
L880-03AU	±13°		100		Φ5	3
L880-04AU	±18°		45		Φ5	4
L880-05AU	±40°		15		Φ5	5
L880-06AU	±4°		170		Φ5	6
L880-09AU	±25°(Long) ±15°(Short)		70		Φ5 Oval	7
L880-46AU					Φ5	8
L880-41AU	±16°		80		Φ4	9
L880-42AU	±23°		50		Φ4	10
L880-31AU					Φ3	11
L880-33AU	±15°		50		Φ3	12
L880-34AU					Φ3	13
L880-36AU	±30°		20		Φ3	14

Total Radiant Power is measured by Photodyne #500

Brightness is measured by Tektronix J-16


Outer Dimension of LED Lamp

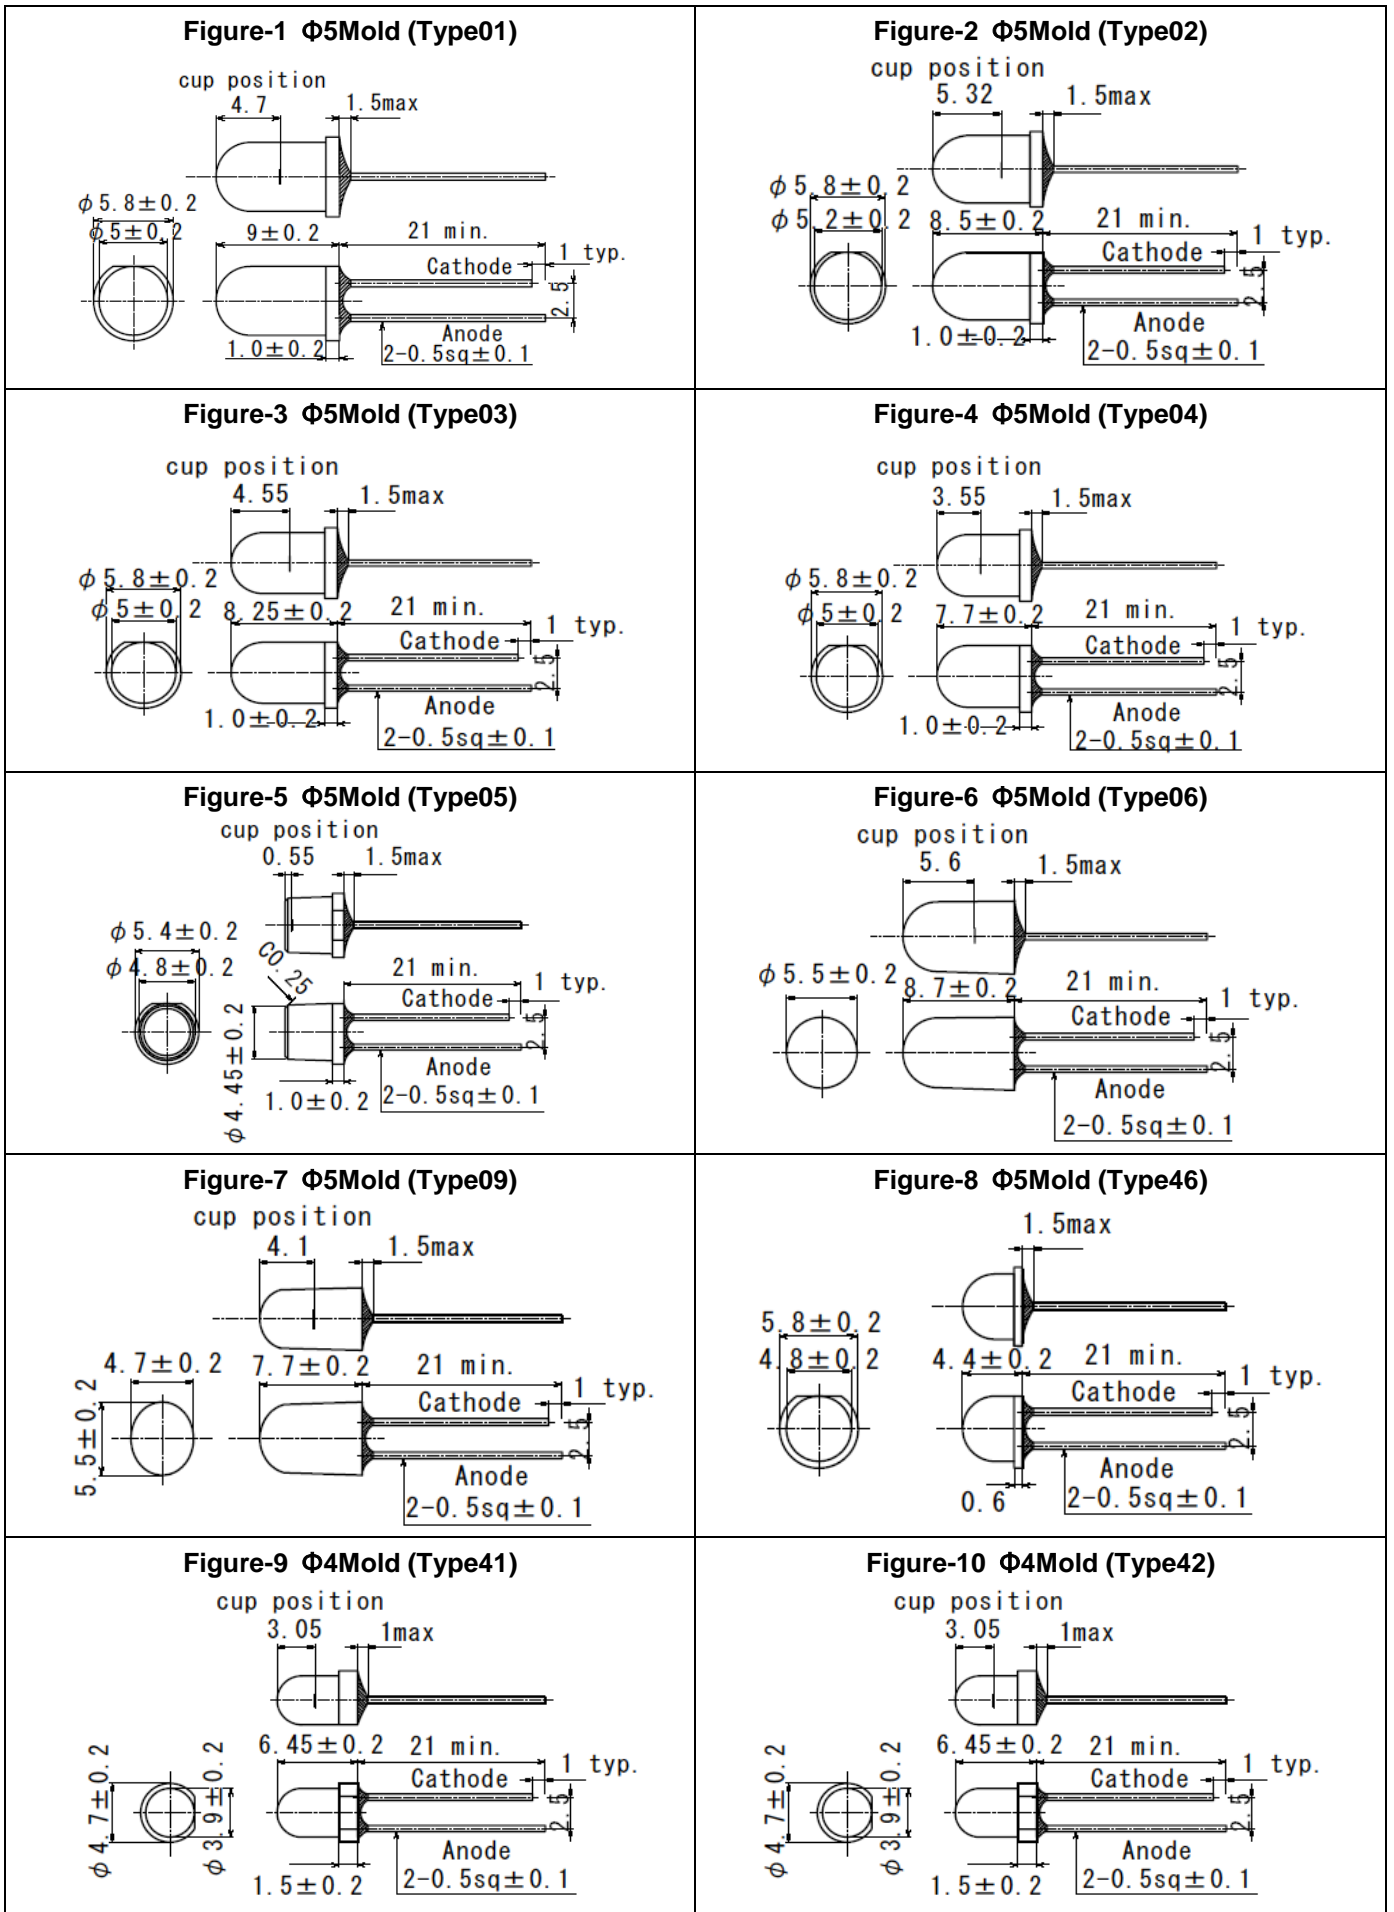



Outer Dimension of LED Lamp





<p>Figure-11 $\Phi 3$Mold (Type31) cup position</p> <p>0.37 1max $\phi 3.6 \pm 0.2$ $\phi 3 \pm 0.2$ 3.5 ± 0.2 21 min. 1 typ. Cathode Anode $2-0.5sq \pm 0.1$ 1.5 typ.</p>	<p>Figure-12 $\Phi 3$Mold (Type33) cup position</p> <p>2.65 1max $\phi 3.8 \pm 0.2$ $\phi 3 \pm 0.2$ 5.3 21 min. 1 typ. Cathode Anode $2-0.5sq \pm 0.1$ 0.8 typ.</p>
<p>Figure-13 $\Phi 3$Mold (Type34) cup position</p> <p>3.25 1max $\phi 3.8 \pm 0.2$ $\phi 3 \pm 0.2$ 5.3 ± 0.2 21 min. 1 typ. Cathode Anode $2-0.5sq \pm 0.1$ 1.5 typ.</p>	<p>Figure-14 $\Phi 3$Mold (Type36) cup position</p> <p>2.1 1max $\phi 4 \pm 0.2$ $\phi 3 \pm 0.2$ 5.3 ± 0.2 21 min. 1 typ. Cathode Anode $2-0.5sq \pm 0.1$ 2 ± 0.4</p>
<p>Figure-15</p>	<p>Figure-16</p>
<p>Figure-17</p>	<p>Figure-18</p>
<p>Figure-19</p>	<p>Figure-20</p>





The Viewing half angle

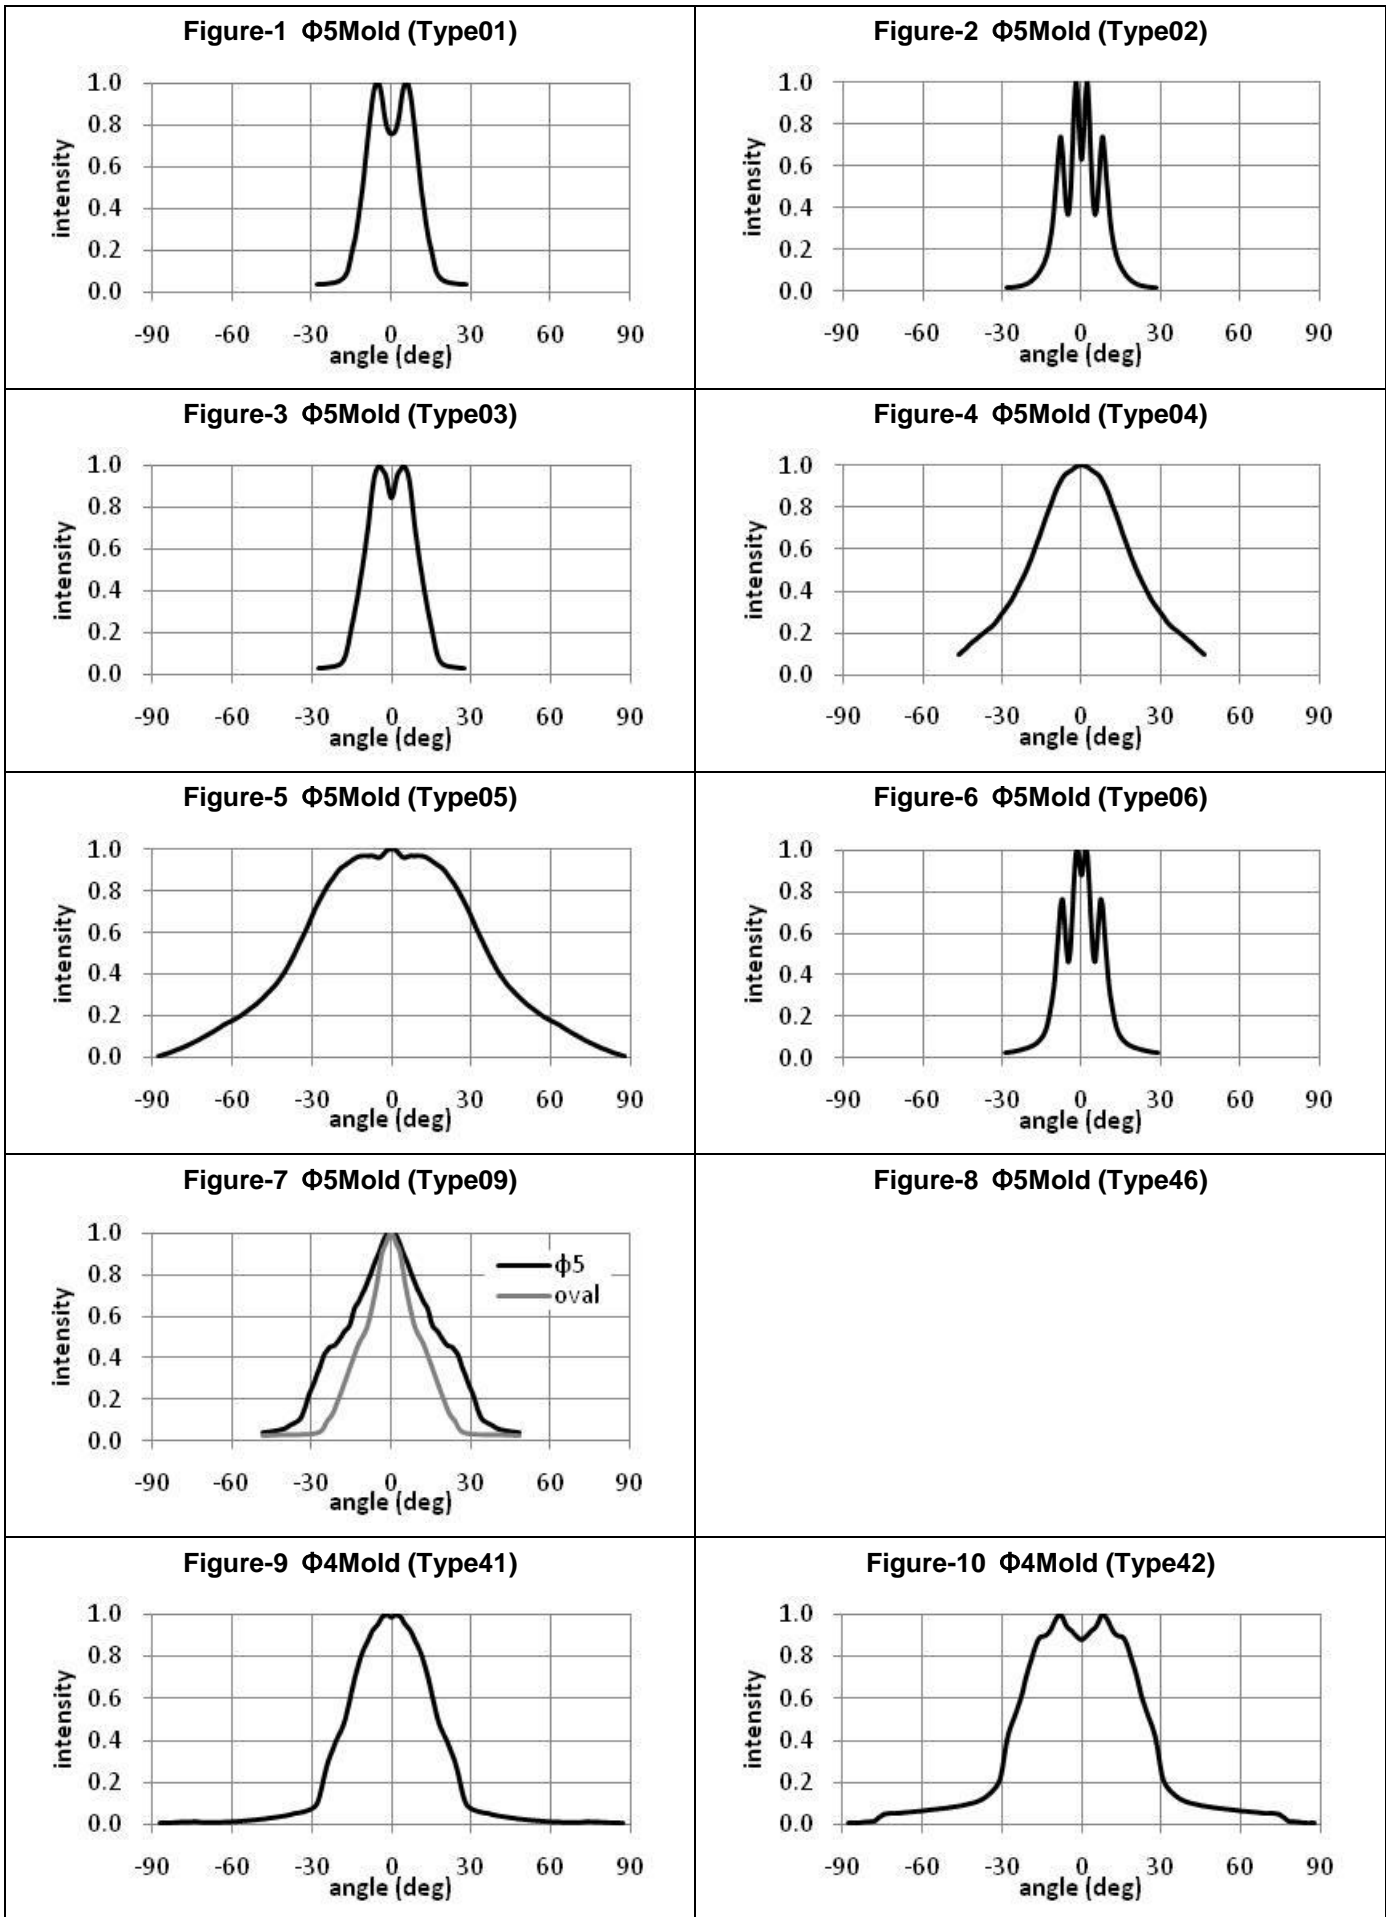


The Viewing half angle
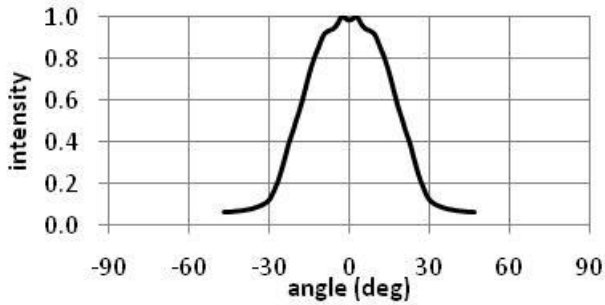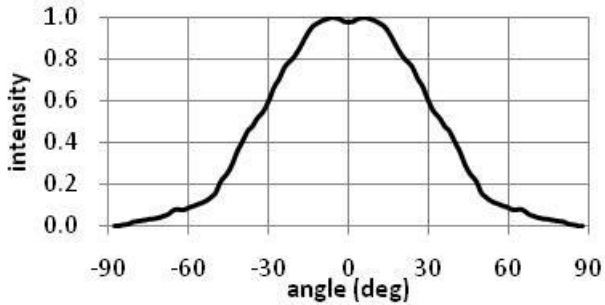
<p>Figure-11 Φ3Mold (Type31)</p>	<p>Figure-12 Φ3Mold (Type33)</p> 
<p>Figure-13 Φ3Mold (Type34)</p>	<p>Figure-14 Φ3Mold (Type36)</p> 
<p>Figure-15</p>	<p>Figure-16</p>
<p>Figure-17</p>	<p>Figure-18</p>
<p>Figure-19</p>	<p>Figure-20</p>

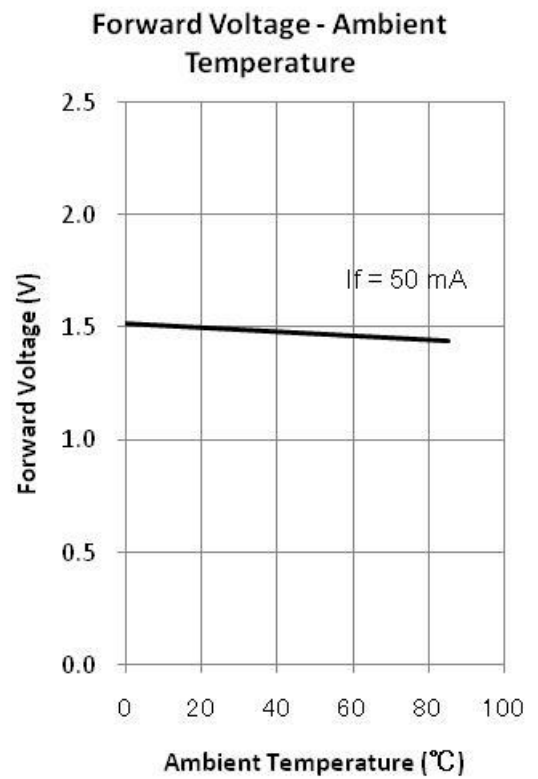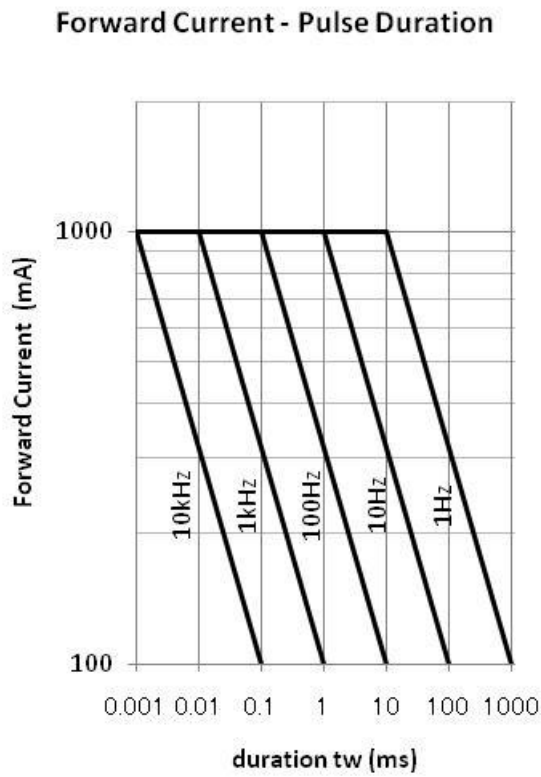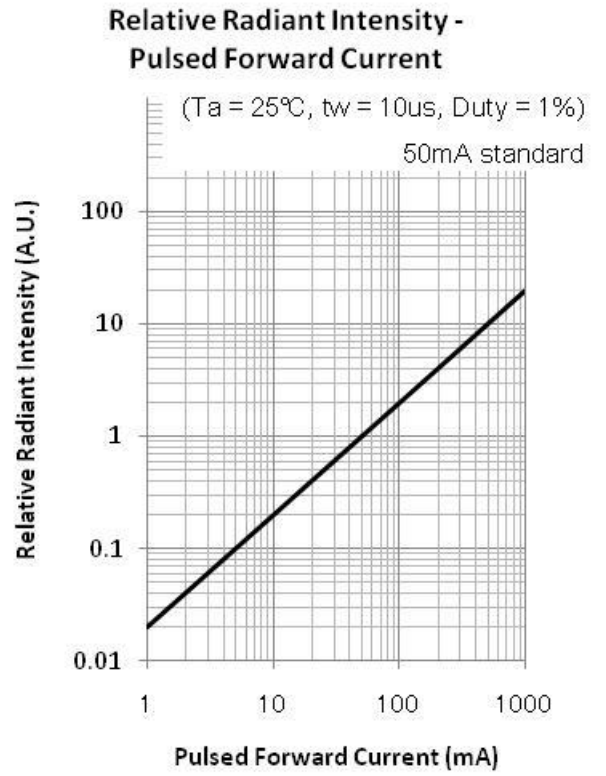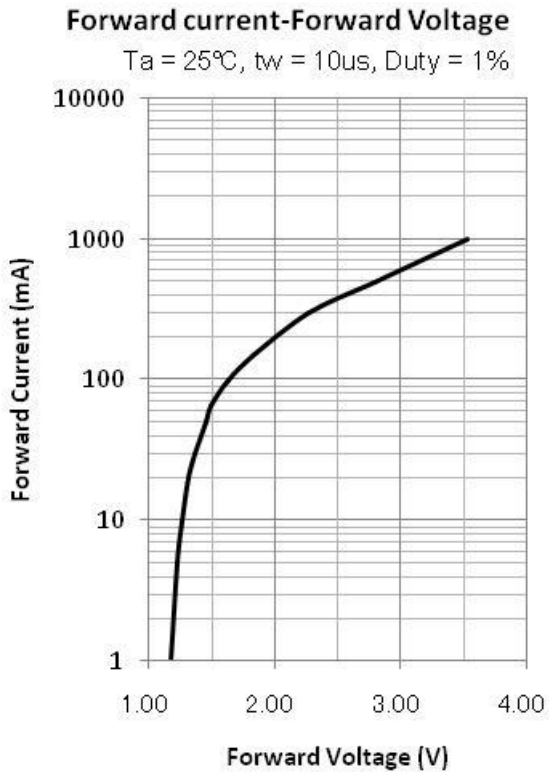


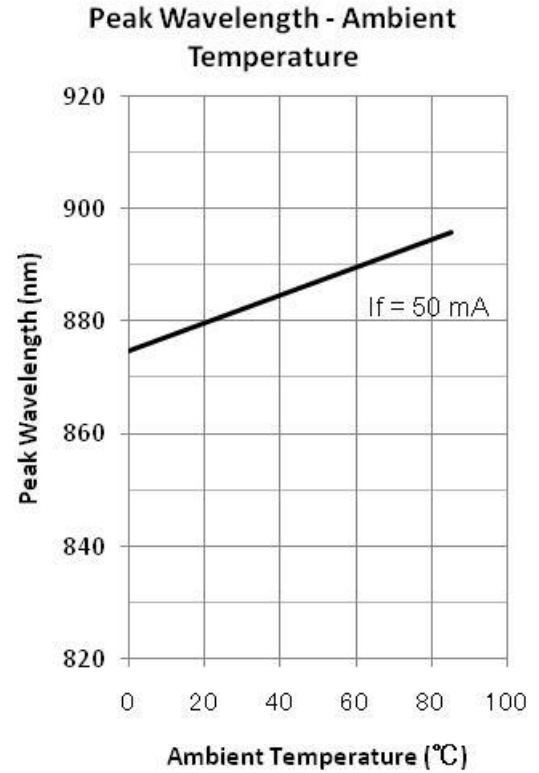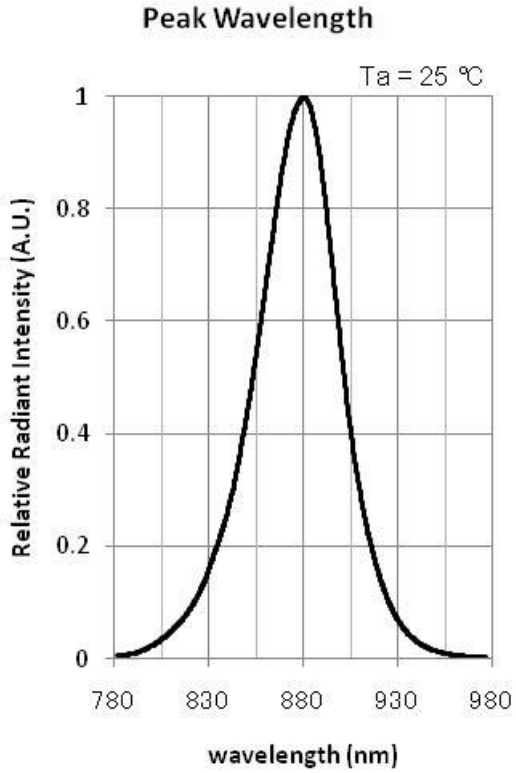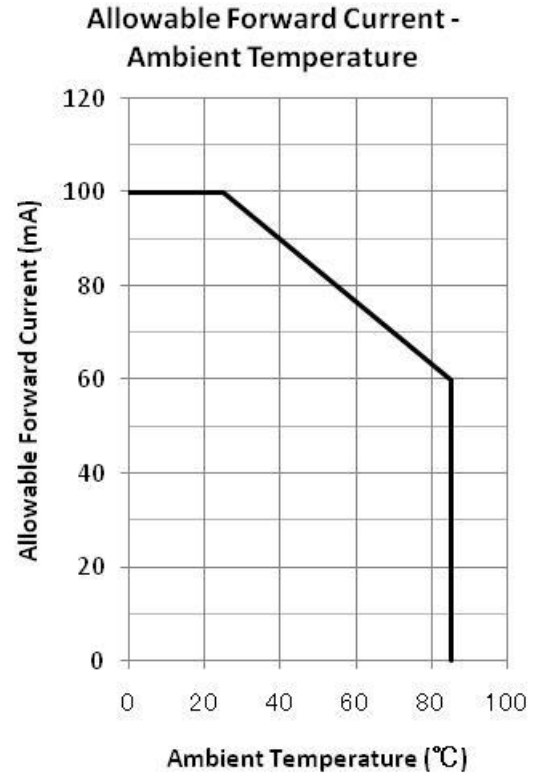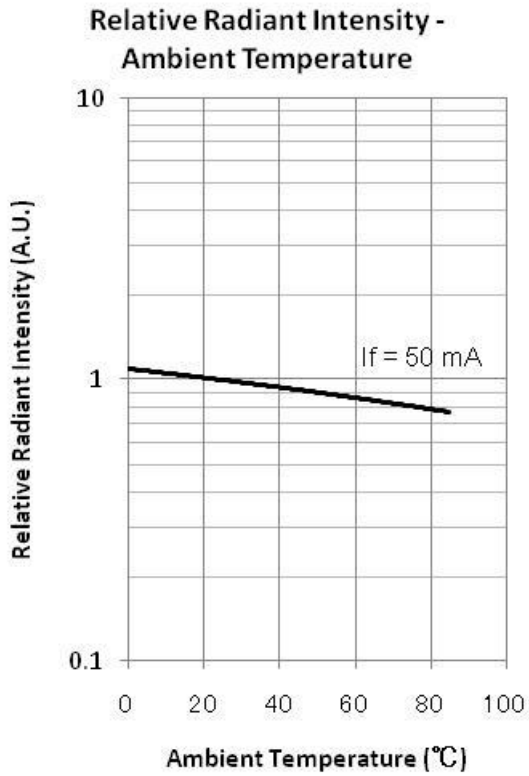

Recommended Land Layout (unit: mm)

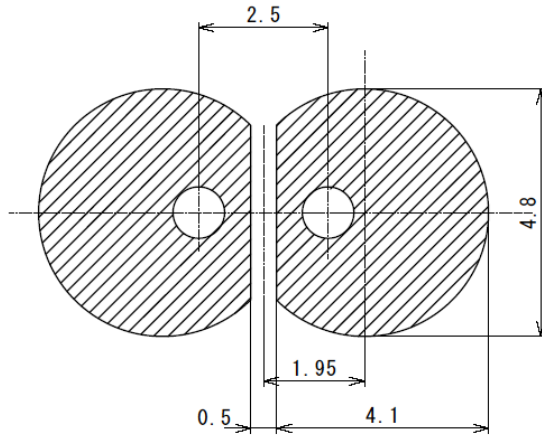

Soldering Conditions

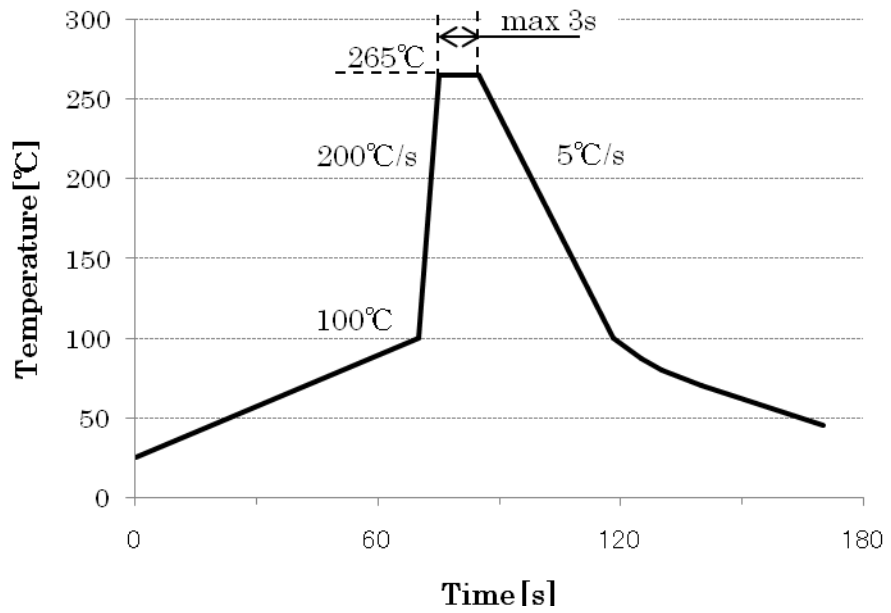

Marubeni America Corporation

3945 Freedom Circle, Suite 1000, Santa Clara, CA 95054 408-330-0650 (Ext. 330), 408-330-0655 (Fax), sales@tech-led.com