


L1050-36 Infrared LED Lamp

L1050-36 is an InGaAsP LED mounted on a lead frame with a clear epoxy lens. On forward bias it emits a spectral band of radiation which peaks at 1050nm.

<Specifications>

1. Product Name: Infrared LED Lamp
2. Type Number: L1050-36
3. Chip:
 - Chip material: InGaAsP
 - Peak Wavelength: 1050nm typ.
4. Package
 - Type: Φ3mm Clear Molding
 - Resin Material: Epoxy Resin
 - Lead Frame: Soldered (Lead Free)

Outer Dimension (Unit:mm)

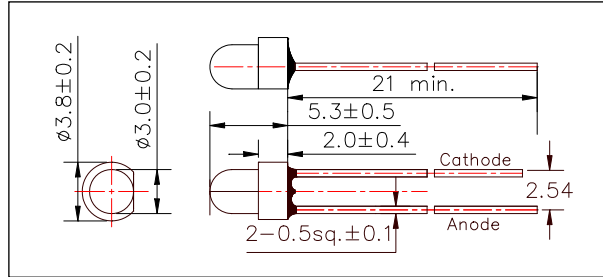

Absolute Maximum Ratings[Ta=25°C]			
Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	120	mW
Forward Current	IF	100	mA
Pulse Forward Current*	IFP	1000	mA
Reverse Voltage	VR	5	V
Operating Temperature	TOPR	-30 ~ +85	°C
Storage Temperature	TSTG	-30 ~ +100	°C
Soldering Temperature**	TSOL	260	°C

* Duty=1% and Pulse Width=10us.

** Soldering condition must be completed within 3 second at 260 °C.

Electro-Optical Characteristics[Ta=25°C]						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=50mA		1.2	1.4	V
Reverse Current	IR	VR=5V			10	uA
Radiated Power*	PO	IF=50mA	1.0	2.0		mW
Radiant Intensity**	IE	IF=50mA		1.3		mW/sr
Peak Wavelength	λP	IF=50mA	1000	1050	1100	nm
Half Width	Δλ	IF=50mA		55		nm
Viewing Half Angle	θ1/2	IF=50mA		±35		deg
Rise Time	tr	IF=50mA		10		ns
Fall Time	tf	IF=50mA		10		ns

* Total Measured by Photodyne #500

(Radiated Power is measured by Ando Optical Multi Meter AQ2140&AQ2742
AQ2140 is setted at 1050nm range.)

** Total Measured by Tektronix J-6512

