


SMT660D/840
High Performance Bi-color TOP LED

<Specifications>

Chip Material: AlGaInP/AlGaAs
 Chip Dimension: 350um x 350um
 400um x 400um
 Number of Chips: 2pcs
 Peak Wavelength: 660nm/840nm typ.
 Lead Frame Die: Silver Plated
 Package Resin: PA6T
 Lens: Silicone or Epoxy Resin

Outer Dimension (Unit:mm)

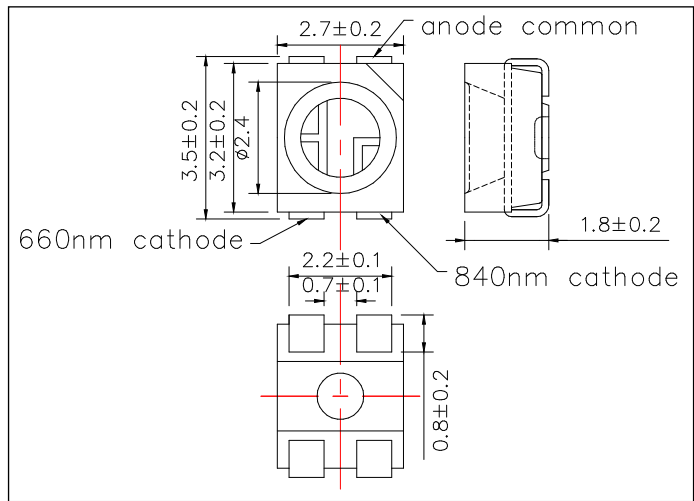

Absolute Maximum Ratings [Ta=25°C]

Item	Symbol	Maximum Rated Value		Unit
		660nm	840nm	
Power Dissipation	PD	120	180	mW
Forward Current	IF	50	100	mA
Pulse Forward Current*	IFP	300	500	mA
Reverse Voltage	VR	5		V
Thermal Resistance	Rthja	80		K/W
Junction Temperature	Tj	120		°C
Operating Temperature	TOPR	-40 ~ +100		°C
Storage Temperature	TSTG	-40 ~ +100		°C
Soldering Temperature**	TSOL	250		°C

* Duty=1% and Pulse Width=10us.

** Soldering condition must be completed within 5 second at 250°C.

Electro-Optical Characteristics [Tc=25°C]


Item	Symbol	Test Condition		Min		Typ		Max		Unit
		660	840	660	840	660	840	660	840	
Forward Voltage	VF	IF=20mA				1.9	1.5	2.4	1.8	V
	VFP	IFP=300mA	IFP=500mA			3.4	2.5			
Radiated Power*	PO	IF=20mA				9	9			mW/sr
		IFP=300mA	IFP=500mA			120	220			
Luminous Flux	ΦV	IF=20mA				540				mlm
Peak Wavelength	λP	IF=20mA		650	830			670	850	nm
Half Width	Δλ	IF=20mA				16	31			nm
Rise Time	tr	IF=20mA				10	10			ns
Fall Time	tf	IF=20mA				15	20			ns

* Measured by S3584-08




660nm


Forward Current - Forward Voltage

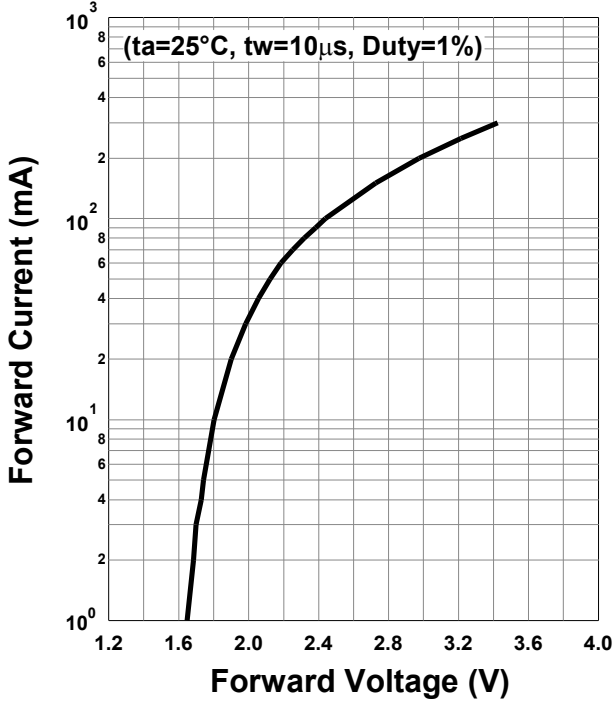


Relative Radiant Intensity - Forward Current

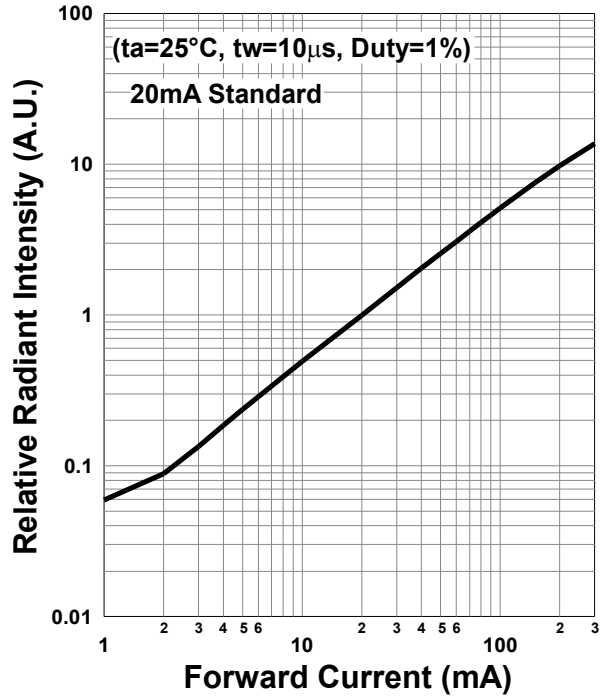





Forward Current - Pulse Duration

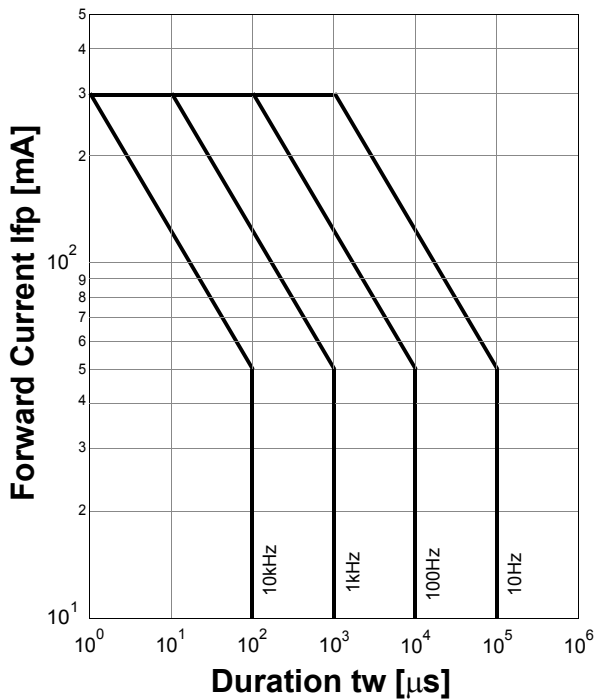

Allowable Forward Current - Ambient Temperature

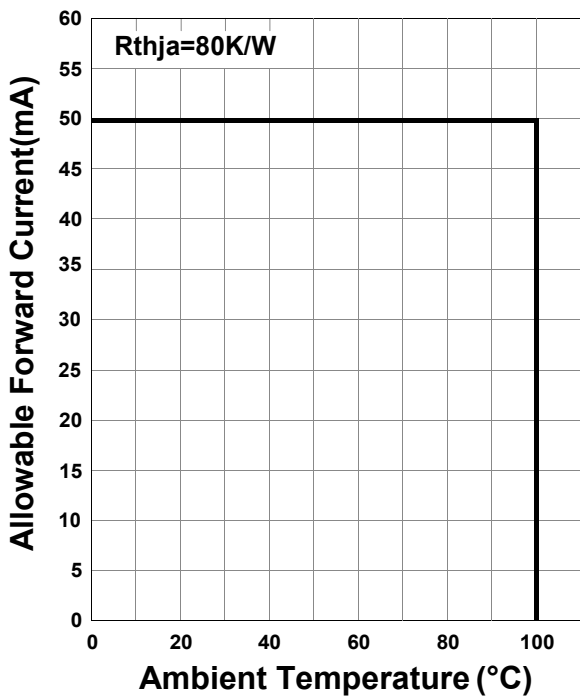


660nm

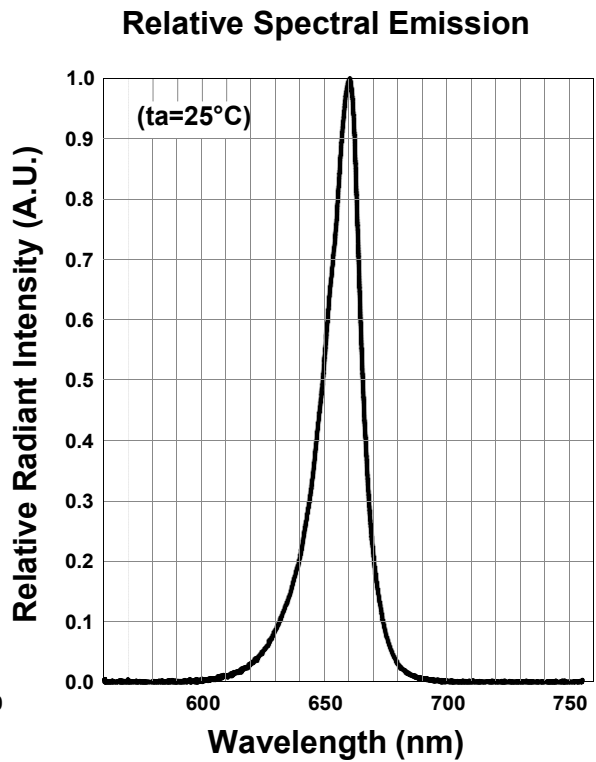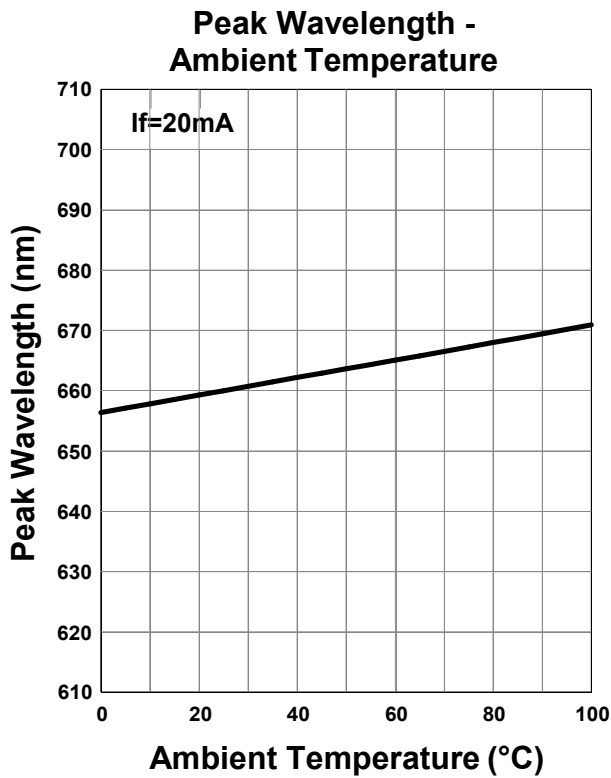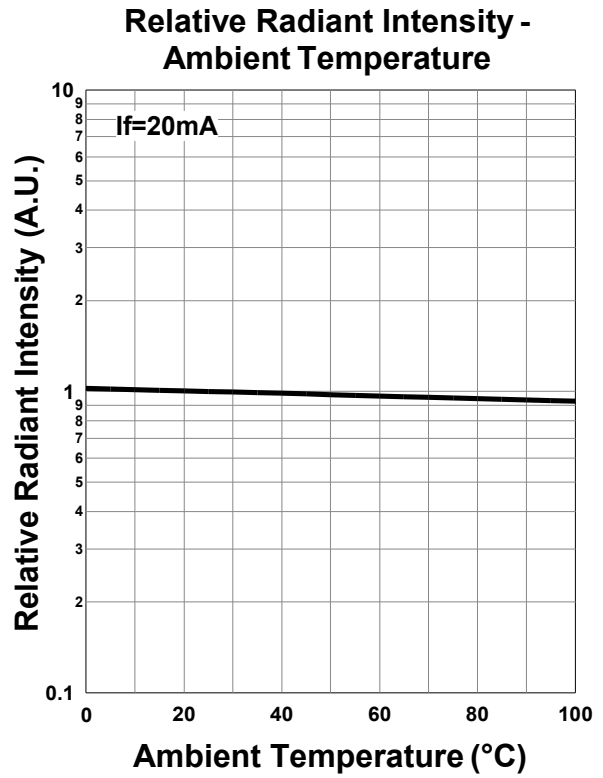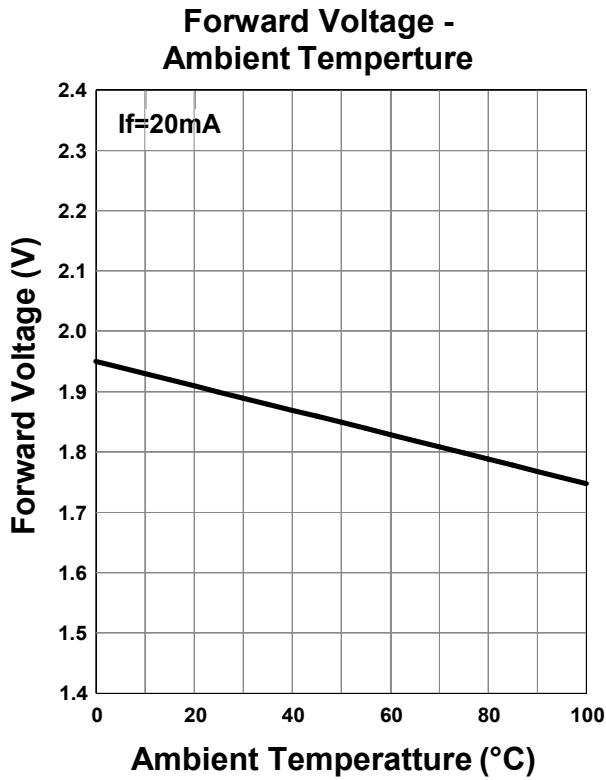


840nm


Forward Current - Forward Voltage

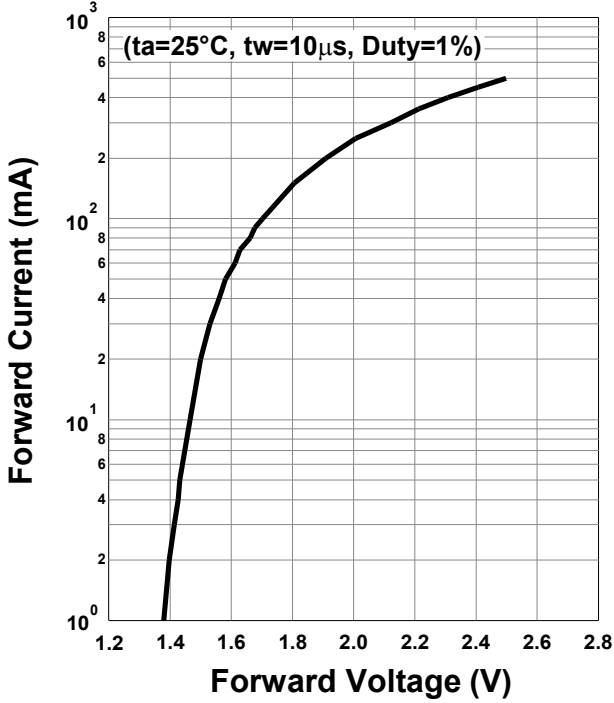


Relative Radiant Intensity - Forward Current

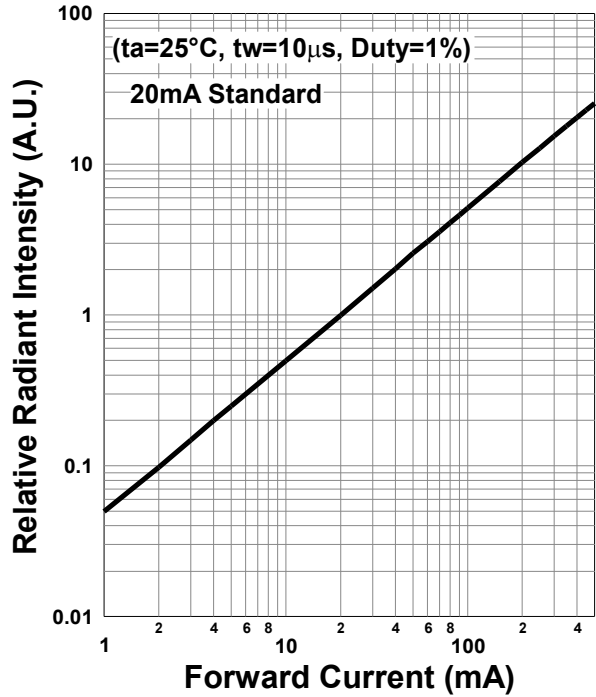

Forward Current - Pulse Duration

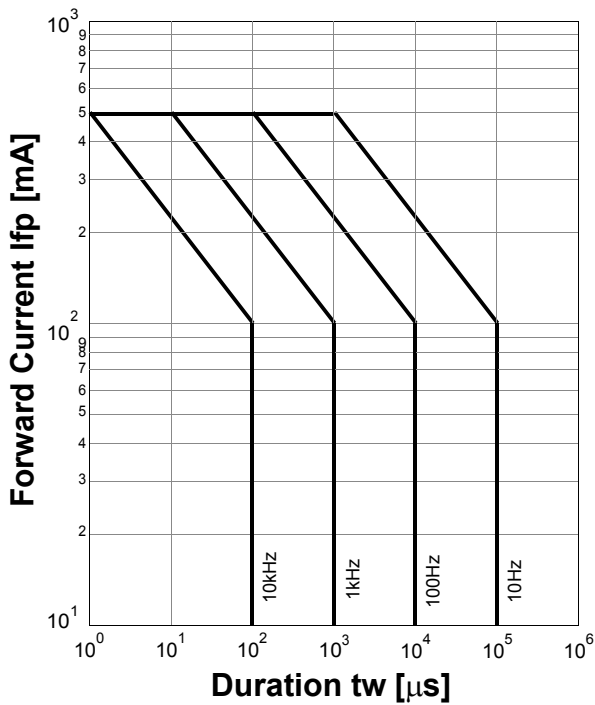


Allowable Forward Current - Ambient Temperature

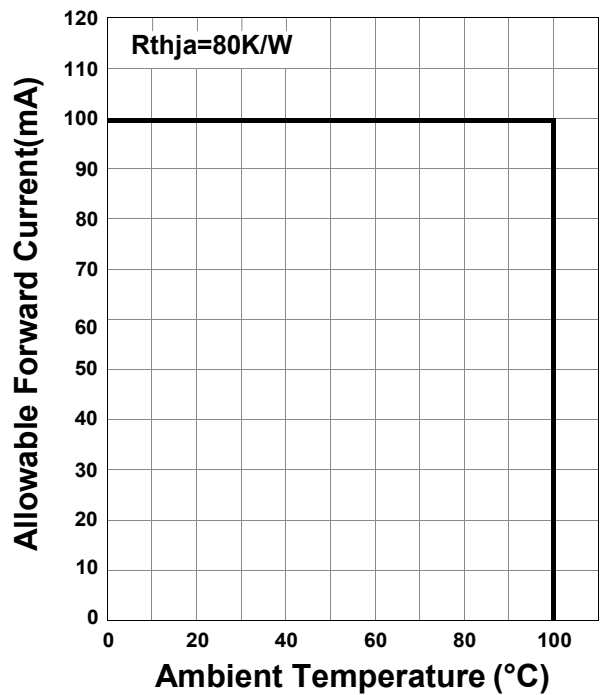


840nm


Forward Voltage - Ambient Temperature

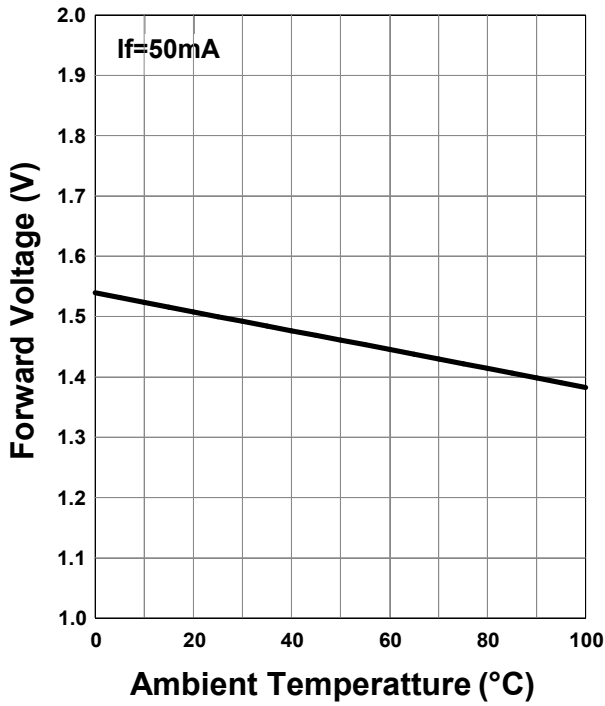


Relative Radiant Intensity - Ambient Temperature

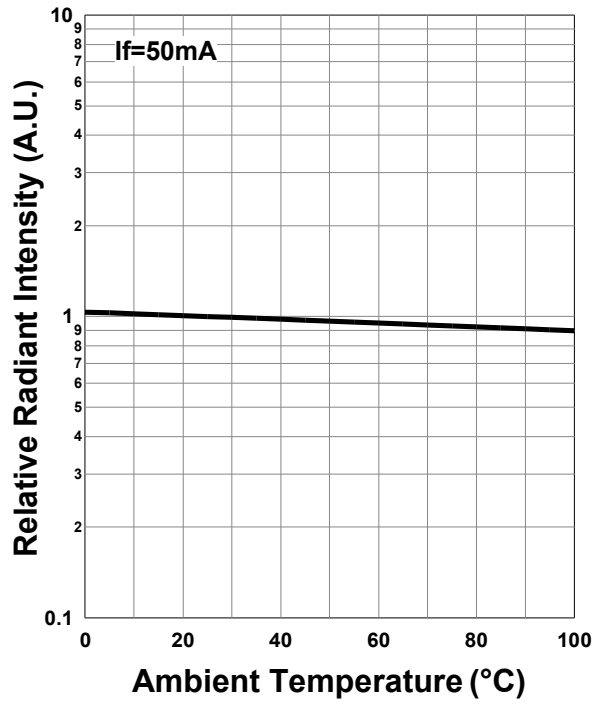

Peak Wavelength - Ambient Temperature


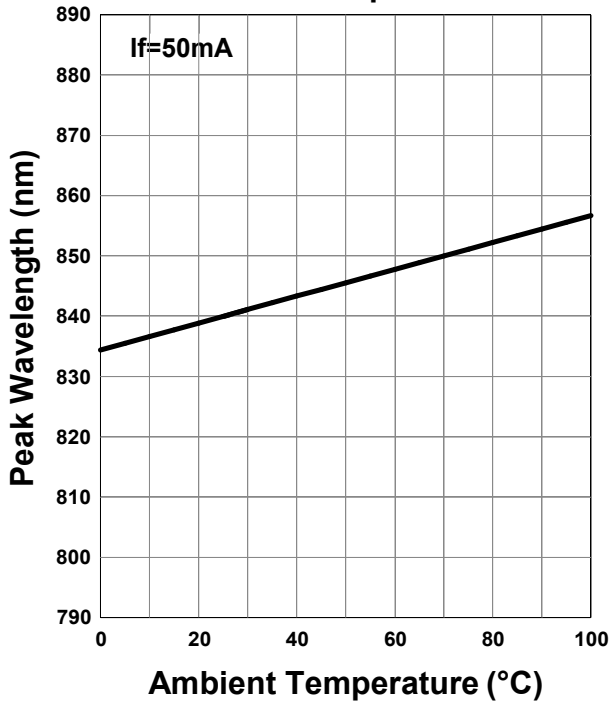


Relative Spectral Emission

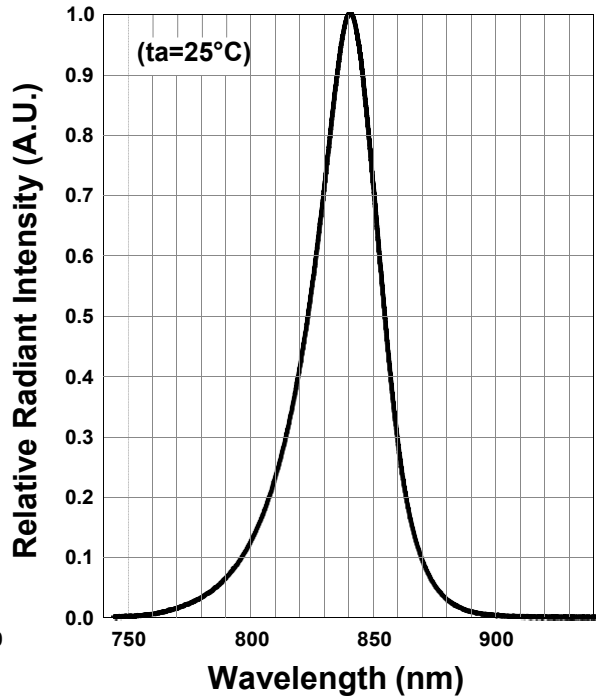

Recommended reflow soldering profile




**Recommended Land Layout
(Unit: mm)**

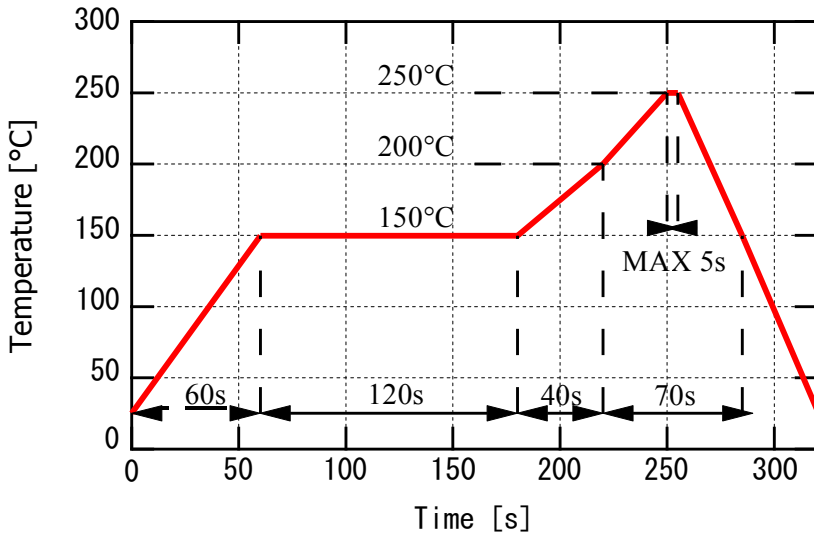

Don't put stress on SMD and a circuit board after soldering

SMD Packing

Tape and Reel Dimensions (Unit: mm)

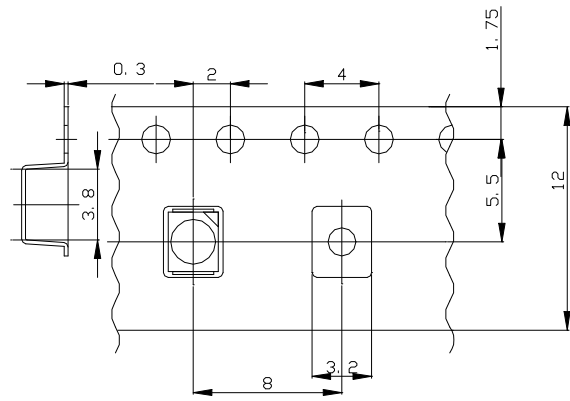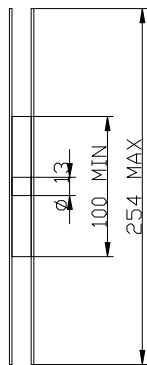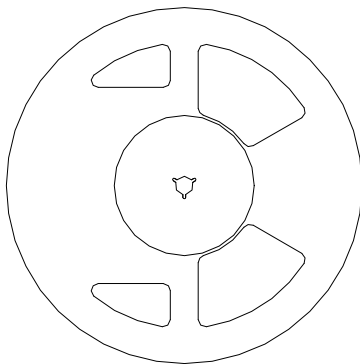

Feeding Direction -->

Wrapping

Moisture barrier bag aluminum laminated film with a desiccant to keep out the moisture absorption during the transportation and storage.

SMD LED storage and handling precautions

Storage Conditions before Opening a Moisture-Barrier Aluminum Bag

- Before opening a moisture-barrier aluminum bag, please store it at <30°C, <60%RH.
- Please note that the maximum shelf life is 12 months under these conditions.

Storage Conditions after Opening a Moisture-Barrier Aluminum Bag

- After opening a moisture-barrier aluminum bag, store the aluminum bag and silica gel in a desiccator.
- After opening the bag, please solder the LEDs within 72 hours in a room with 5 - 30°C, <50%RH.
- Please put any unused, remaining LEDs and silica gel back in the same aluminum bag and then vacuum-seal the bag.
- It is recommended to keep the re-sealed bag in a desiccator at <30%RH.
- The 72-hour- long floor life does not include the time while LEDs are stored in the moisture-barrier aluminum bag. However, we strongly recommend to solder the LEDs as soon as possible after opening the aluminum bag

Notes about Re-sealing a Moisture-Barrier Aluminum Bag

- When vacuum-sealing an opened aluminum bag, if you find the moisture-indicator of the silica gel has changed to pink from blue (indicating a relative humidity of 30 % or more), please do not use the unused LEDs, the aluminum bag, or the silica gel.

Notes about Opening a Re-sealed Moisture-Barrier Aluminum Bag

- When opening a vacuumed and re-sealed aluminum bag in order to use the remaining LEDs stored in the bag, if you find that the moisture-indicator of the silica has changed to pink, please do not use the LEDs.

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements.

Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.

2016.06